

DRY
BATTERY

DRY | CONVENTIONAL
REF 12N5-3B

12V
VOLTAGE - V
40A
CCA - A
5.3Ah
CAPACITY - Ah (20Hr)
5Ah
CAPACITY - Ah (10Hr)
TECHNOLOGY

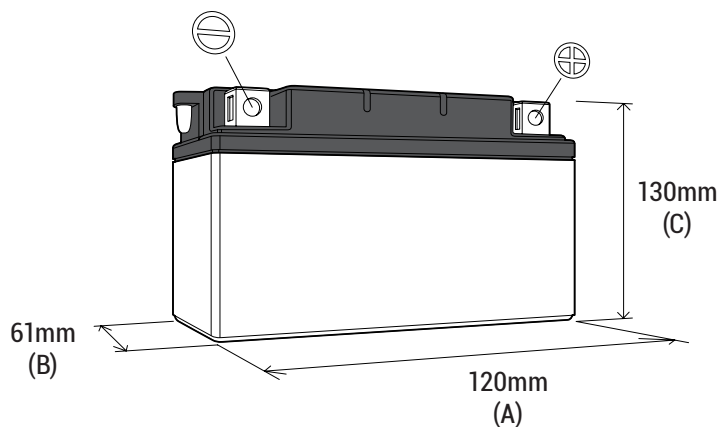
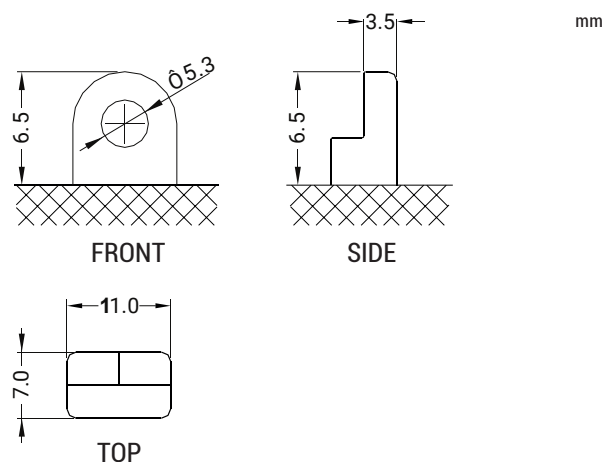
- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

FEATURES

- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

DIMENSIONS

Length (A) :	120±2mm
Width (B) :	61±2mm
Container height :	130±2mm
Total height (C) :	130±2mm


TERMINALS

UPGRADE FOR
WEIGHT

Battery (with acid) : Approx 2.00kg

MOUNTING ANGLE
