

DRY
BATTERY

DRY | CONVENTIONAL

 REF **12N5.5-4A**

12v VOLTAGE - V

55A CCA - A

5.8Ah CAPACITY - Ah (20Hr)

5.5Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

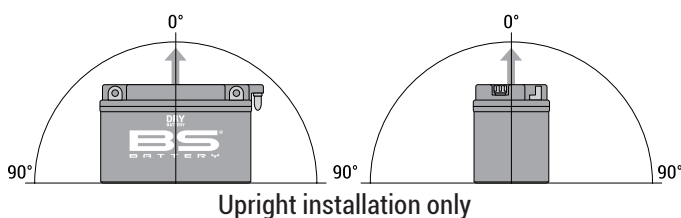
- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

FEATURES

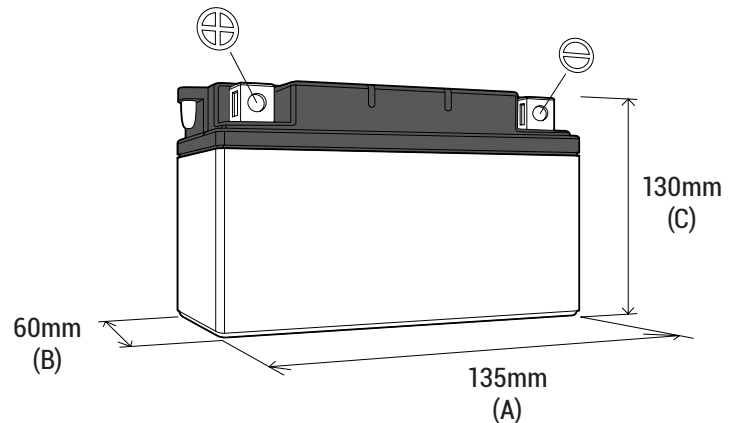
- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

UPGRADE FOR
WEIGHT

Battery (with acid) : Approx 2.15kg

MOUNTING ANGLE

DIMENSIONS

Length (A) : 135±2mm
 Width (B) : 60±2mm
 Container height : 130±2mm
 Total height (C) : 130±2mm


TERMINALS
