

**DRY**  
BATTERY

**DRY | CONVENTIONAL**

 REF **12N7A-3A**

**12v** VOLTAGE - V

**70A** CCA - A

**7.4Ah** VOLTAGE - Ah (20Hr)

**7.0Ah** VOLTAGE - Ah (10Hr)

**TECHNOLOGY**

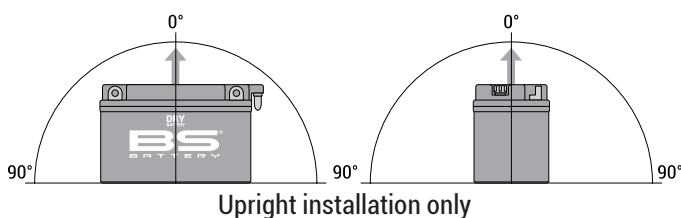
- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

**FEATURES**

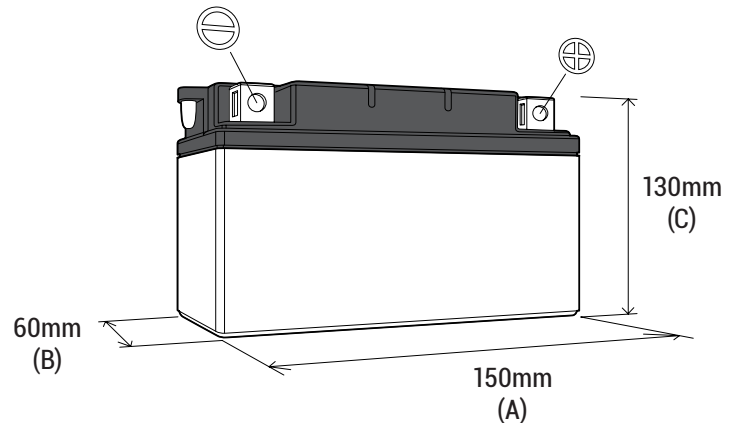
- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

**UPGRADE FOR**
**WEIGHT**

Battery (with acid) : Approx 2.59kg (5.71lbs)

**MOUNTING ANGLE**

**DIMENSIONS**

Length (A) :	150±2mm (5.91in)
Width (B) :	60±2mm (2.36in)
Container height :	130±2mm (5.12in)
Total height (C) :	130±2mm (5.12in)


**TERMINALS**
