

**DRY**  
BATTERY

**DRY | CONVENTIONAL**
**REF B50-N18L-A/A2**

**12V** VOLTAGE - V

**250A** CCA - A

**21.1Ah** CAPACITY - Ah (20Hr)

**20Ah** CAPACITY - Ah (10Hr)

**TECHNOLOGY**

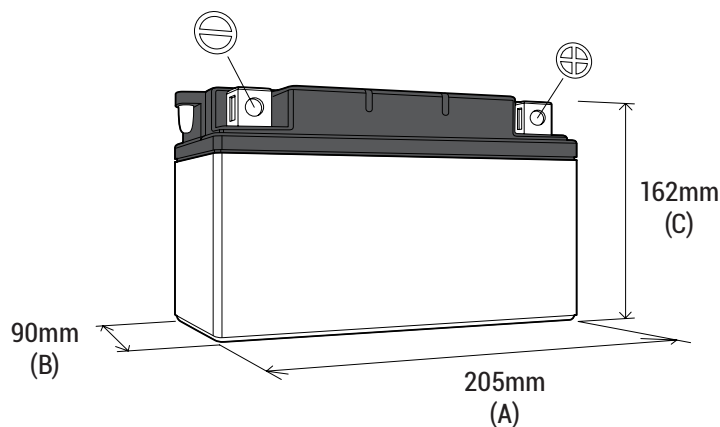
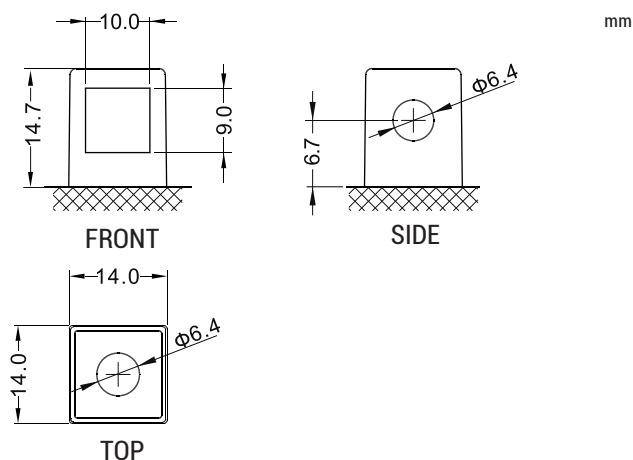
- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

**FEATURES**

- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

**DIMENSIONS**

Length (A) : 205±2mm  
 Width (B) : 90±2mm  
 Container height : 162±2mm  
 Total height (C) : 162±2mm


**TERMINALS**

**UPGRADE FOR**
**WEIGHT**

Battery (with acid) : Approx 6.53kg

**MOUNTING ANGLE**
