BATTERY DATA SHEET





DRYBATTERY

DRY | CONVENTIONAL

REF BB6.5L-B



12v VOLTAGE - v

65a CCA - A

CAPACITY AL (2011)

TECHNOLOGY

- Lead acid dry charged construction (absorbed acid)
- · No acid in cells, must be filled with acid before use
- 6 & 12V batteries


FEATURES

- Upright installation only
- · Has to be checked periodically and refilled with water if necessary
- · Internal gas emission through venting hole
- · Handle with care to prevent acid spillage
- Regular life duration
- · Does not need to be recharged while stocked


DIMENSIONS

Length (A):
Width (B):
Container height:
Total height (C):

138±2mm 73±2mm 107±2mm 107±2mm

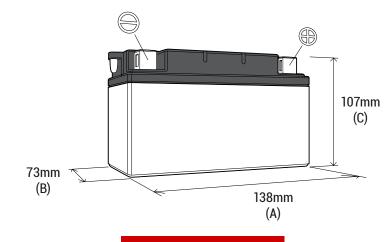

TERMINALS (mm)



TOP

UPGRADE FOR

WEIGHT

Battery (with acid) :

Approx 2.36kg

MOUNTING ANGLE

