

SLA MAX
FACTORY ACTIVATED

SLA MAX | PREMIUM QUALITY READY TO START

REF **BTX16H****12v**

VOLTAGE - V

220A

CCA - A (EN)

16Ah

CAPACITY - Ah (20Hr)

14Ah

CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- Factory activated : Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- Increased power & Extended life
- Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling - Very safe


UPGRADE FOR

BTX16-BS ; BTX16

WEIGHT


Battery (with acid) : Approx 5.45kg (12.0lbs)

MOUNTING ANGLE

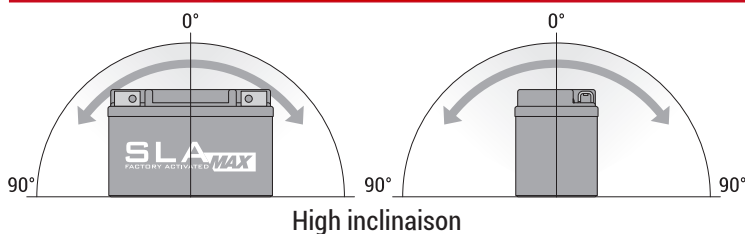

DIMENSIONS

Length (A) :	150±2mm (5.91in)
Width (B) :	87±2mm (3.43in)
Container height :	161±2mm (6.34in)
Total height (C) :	161±2mm (6.34in)

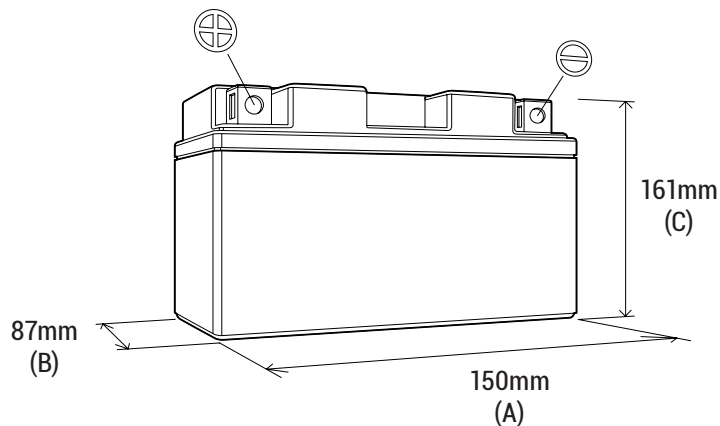

TERMINALS

