

FEATURES



Ready to use Just plug & play



Absolutely maintenance free



Multi-positioning mounting Up to 90°



No acid handling



Very safe

Spillproof design



Totally sealed

Increased power & extended cycle life




Superior capacity

HD SPACERS

* HD spacers are only included with Harley Davidson battery models

MOUNTING ANGLES



High inclinaison

Extreme vibration resistance



HD spacers included*



Safe & environmentally friendly



Low discharge rate

COMPATIBLE CHARGERS

<i>BS 10</i>	Battery size up to 20Ah
<i>BS 15</i>	Battery size up to 30Ah
<i>BS 30</i>	Battery size up to 60Ah
<i>B5 60</i>	Battery size up to 120Ah
BK 20	Battery size up to 40Ah

10 www.bs-battery.com

FOR HARLEY DAVIDSON

SLA MAX HD models are equipped with specific terminals to fit the mounting without using spacer rings and also with reinforced casing for a maximum vibration resistance. All these features fulfill heavy duty engines requirements such as Harley Davidson vehicles.



BS BATTERY TYPE - 12V	CAPACITY Ah (10Hr)	CAPACITY Ah (20Hr)	CCA (EN) A (-18°C)	DIMENSIONS (±2mm)			ASSEMBLY LAYOUT	TERMINAL
				L	W	Н	ASSEMBLT LATUUT	TENWINAL
BTX14HL	14	14.7	220	150	87	145	- +	
BTX20HL	20	21.1	310	176	87	154		
BIX30HL	30	31.6	430	166	130	175	<u>-</u> +	



Terminal specifically designed to facilitate the mounting on Harley **Davidson motorcycles**



BTX20HL and BIX30HL Harley Davidson specific terminals



BTX14HL Harley Davidson specific terminals



Battery case with a grid framework for a maximum vibration resistance

FOR BMW

Developped to fit BMW latest bikes, these SLA Max models are the most advanced batteries on the market with an increased capacity and performance.

BS BATTERY TYPE - 12V	CAPACITY Ah (10Hr)	CAPACITY Ah (20Hr)	CCA (EN) A (-18°C)	DIMENSIONS (±2mm)			ASSEMBLY LAYOUT	TERMINAL
DO DATTENT TIPE - 12V				L	W	Н	ASSEMBLY LATUUT	TENWINAL
BTX14H*	14	14.7	220	150	87	145	+ -	
ВТХ16H ⁻	14	16	220	150	87	161	+ -	
51913	21	22	275	182	77	168		

FOR POLARIS & INDIAN

Developped to fit Indian latest bikes, this SLA Max model provides increased power, extended life and maximum reliability.

BS BATTERY TYPE - 12V	CAPACITY CAPACIT	CAPACITY	CCA (EN)	DIMENSIONS (±2mm)			ASSEMBLY LAYOUT	TERMINAL
DO DATIENT TIPE - 12V	Ah (10Hr)	OHr) Ah (20Hr) A (-18°C) L	W	Н				
BTX14AH·	13	13,7	240	134	89	164	+	

* Models manufactured and designed according to OEM specifications



PLUG ? PLAY








+80 AVAILABLE TYPES OF "READY TO START" BATTERIES

COMPARATIVE FEATURES

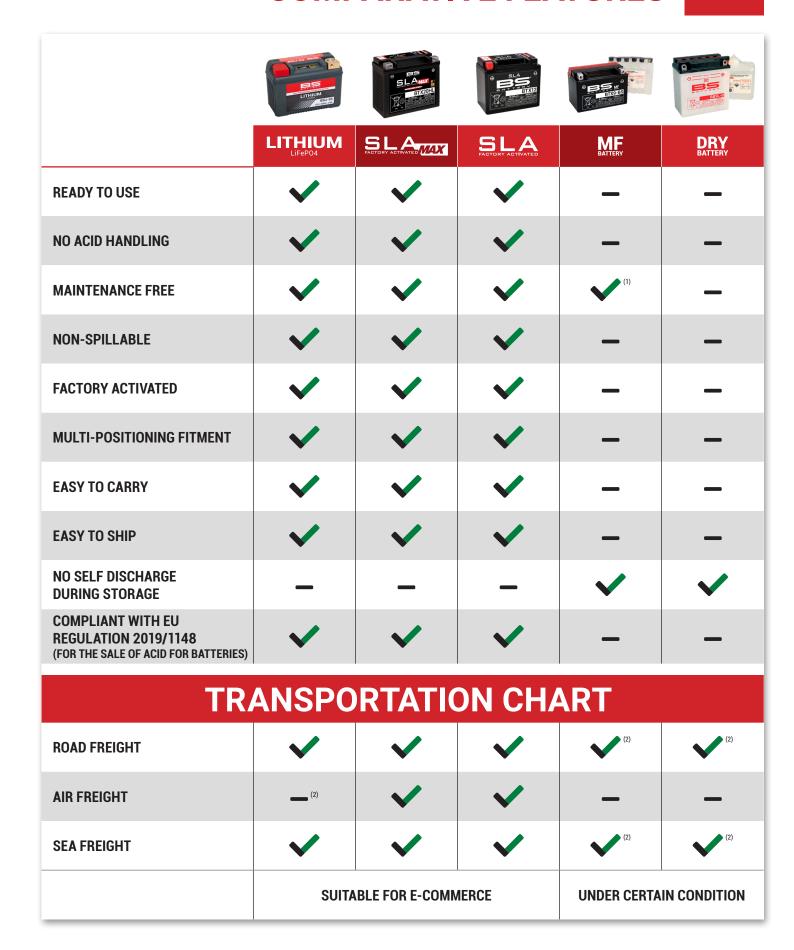

⁽¹⁾ Once activated

The Power you need...

⁽²⁾ According to ADR, IMDG & IATA regulations