

LITHIUM LiFePO4

LITHIUM (LiFePO4) | High Performance

REF **BSLi-02**



TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


FEATURES

- Fast charging
- Multi-positionning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230 C°
- Lighter weight

REPLACEMENTS

SLA		MF	DRY
BTX4L+/BTZ5S	BB4L-B	BTX4L+-BS/	BB4L-B
BTZ6S/BTX5L	BB5L-B	BTZ5S-BS	BB5L-B
BTZ7S	BB7C-A	BTX5L-BS	BB7C-A
BTZ7V	BB7L-B2	BTX7L-BS	BB7L-B
BTZ8V	12N5.5-3B	BTZ6S-BS	BB7L-B2
BTX7L		BTZ7S-BS	12N5.5-3B
			12N5-3B
			12N7-3B

MOUNTING ANGLE

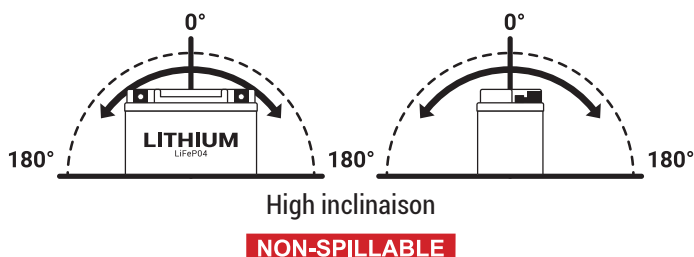

12_v VOLTAGE

24_{Wh} ENERGY


140_A CCA - A (EN)

OPERATING TEMP. RANGE

Charge temperature:	0°C to 45°C
Discharge temperature:	-20°C to 55°C
Storage temperature:	0°C to 30°C

DIMENSIONS & WEIGHT

Length (L):	107mm ±1mm
Width (W):	56mm ±1mm
Height (H):	0.55kg (tolerance ±3%)

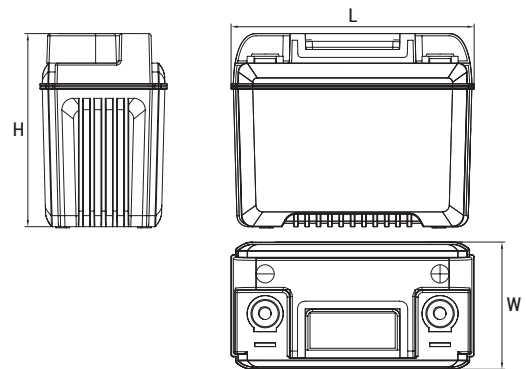

TERMINALS (mm)

