

LITHIUM LiFePO4

LITHIUM (LiFePO4) | High Performance

REF **BSLi-13**



12_v VOLTAGE

96_{Wh} ENERGY

560_A CCA - A (EN)

TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


FEATURES

- Fast charging
- Multi-positioning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230°C
- Lighter weight

REPLACEMENTS

SLA
51913

MOUNTING ANGLE

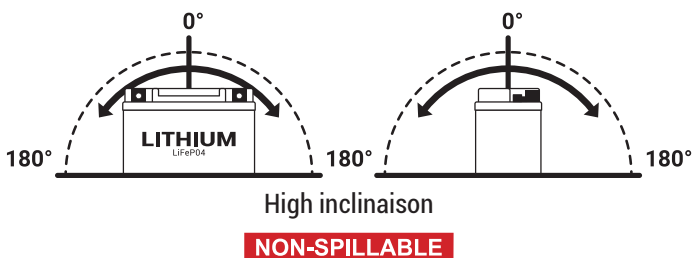


OPERATING TEMP. RANGE

Charge temperature: 0°C to 45°C
Discharge temperature: -20°C to 55°C
Storage temperature: 0°C to 30°C

DIMENSIONS & WEIGHT

Length (L): 183mm ±1mm
Width (W): 79mm ±1mm
Height (H): 170mm ±2mm
Weight: 1.980kg (tolerance ±3%)

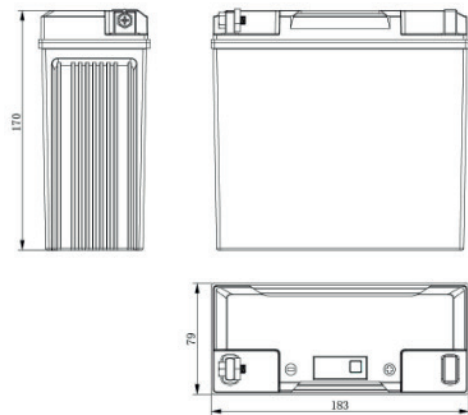

TERMINALS (mm)

