

DRY
BATTERY

DRY | CONVENTIONAL

 REF **SB50-N18L-AT**

12V VOLTAGE - V

250A CCA - A

21.1Ah CAPACITY - Ah (20Hr)

20Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

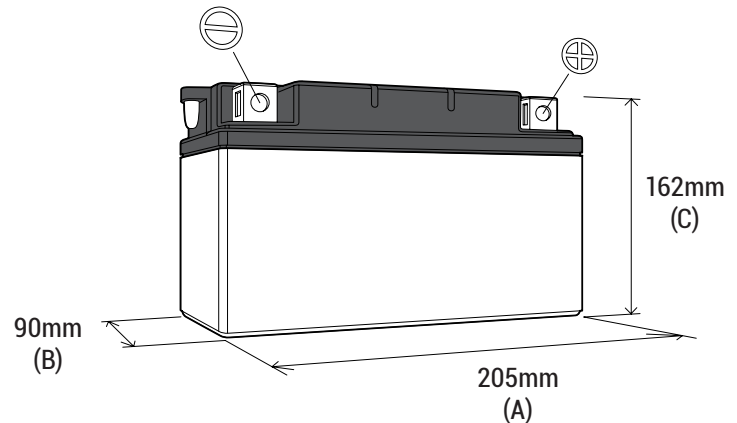
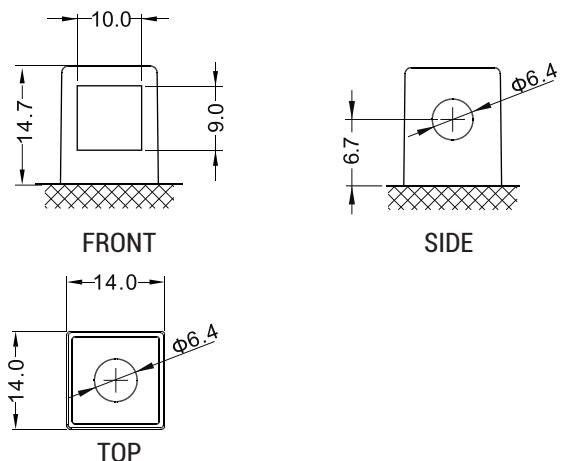
- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

FEATURES

- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

DIMENSIONS

Length (A):	205mm ±2mm
Width (B):	90mm ±2mm
Container height:	162mm ±2mm
Total height (C):	162mm ±2mm


TERMINALS (mm)

UPGRADE FOR
WEIGHT

Battery (with acid): Approx 6.53kg

MOUNTING ANGLE
