

MF
BATTERY

MF | MAINTENANCE FREE

REF

BTX24HL-BS


12V

VOLTAGE - V

350A

CCA - A

22.1Ah

CAPACITY - Ah (20Hr)

21Ah

CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM

FEATURES

- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold

UPGRADE FOR

DRY B50-N18L-A3

WEIGHT

Battery (with acid):

Approx 6.99kg


MOUNTING ANGLE



Medium inclinaison

DIMENSIONS

Length (A):	205mm ±2mm
Width (B):	87mm ±2mm
Container height:	162mm ±2mm
Total height (C):	162mm ±2mm

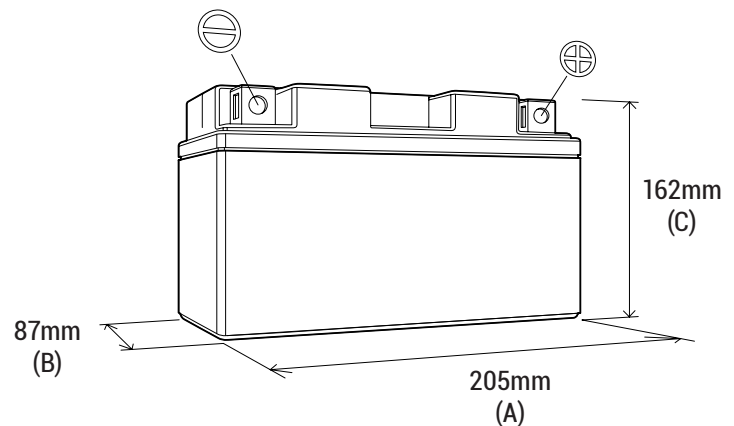

TERMINALS (mm)

