

**MF**  
BATTERY

MF | MAINTENANCE FREE

REF **BTX14AHL-BS**

12V VOLTAGE - V

210A CCA - A

12.6Ah CAPACITY - Ah (20Hr)

12Ah CAPACITY - Ah (10Hr)

## TECHNOLOGY

- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM

## FEATURES

- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold


## UPGRADE FOR

**DRY** BB14-A2 (12N14-3A); BB14L-B2

## WEIGHT


Battery (with acid): Approx 4.71kg

## MOUNTING ANGLE

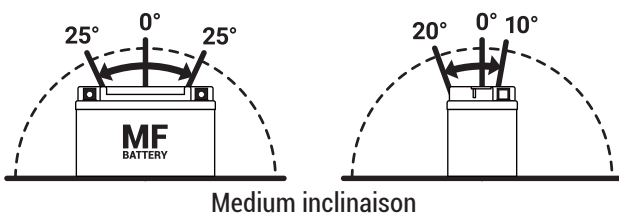

## DIMENSIONS

Length (A):	133mm ±2mm
Width (B):	90mm ±2mm
Container height:	164mm ±2mm
Total height (C):	164mm ±2mm

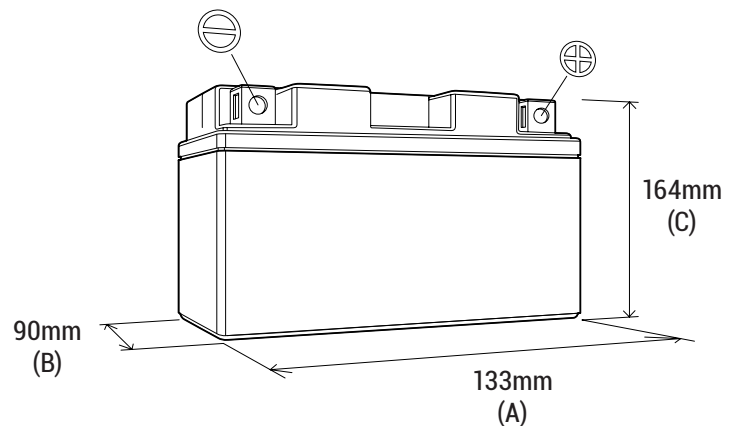

## TERMINALS (mm)

