

MF
BATTERY

MF | MAINTENANCE FREE

REF **BTX4L-BS+**

12V VOLTAGE - V

50A CCA - A

4.2Ah CAPACITY - Ah (20Hr)

4Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM

FEATURES


- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold

UPGRADE FOR

WEIGHT


Battery (with acid): Approx 1.54kg

MOUNTING ANGLE

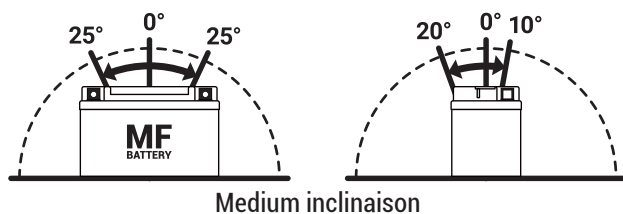

DIMENSIONS

Length (A): 113mm ±2mm
 Width (B): 70mm ±2mm
 Container height: 85mm ±2mm
 Total height (C): 85mm ±2mm

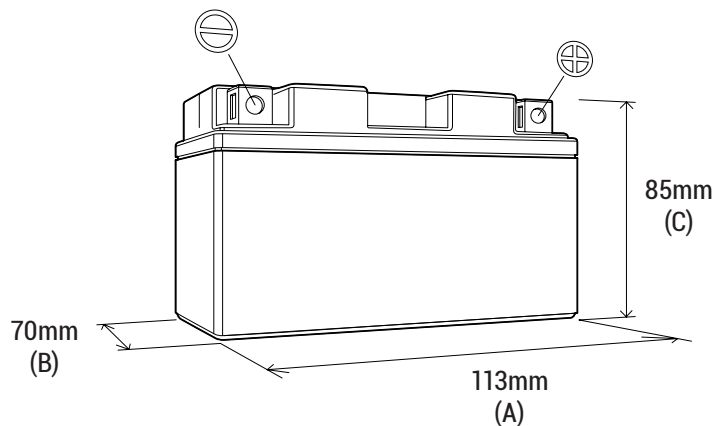

TERMINALS (mm)

