

SLA
FACTORY ACTIVATED

SLA | READY TO START

BTX14AHL
REF **BB14L-A2/B2**
**12V**

VOLTAGE - V

210A

CCA - A (EN)

14.7Ah

CAPACITY - Ah (20Hr)

14Ah

CAPACITY - Ah (10Hr)

TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance

UPGRADE FOR


DRY BB14L-A2 ; 12N14-3A ; BB14L-B2

MF BTX14AHL-BS

WEIGHT


Battery (with acid): Approx 4.40kg

MOUNTING ANGLE

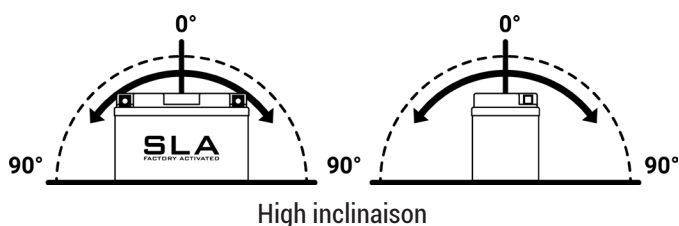

DIMENSIONS

Length (A):	135mm ±2mm
Width (B):	90mm ±2mm
Container height:	164mm ±2mm
Total height (C):	164mm ±2mm

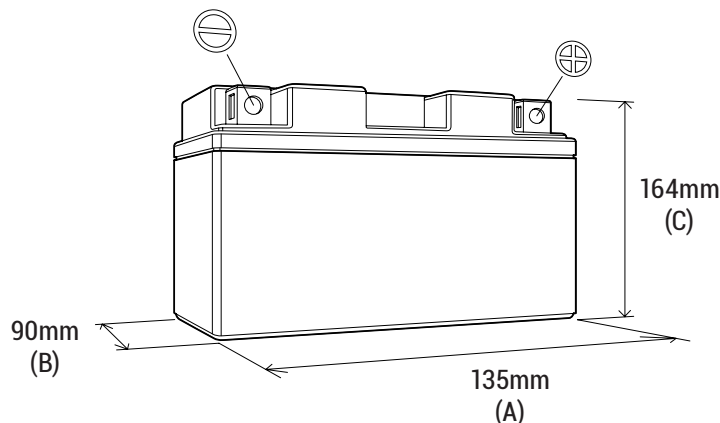

TERMINALS (mm)

