

SLA
FACTORY ACTIVATED

SLA | READY TO START

REF **BB3L-A/B****12v** VOLTAGE - V**35A** CCA - A (EN)**3.2Ah** CAPACITY - Ah (20Hr)**3Ah** CAPACITY - Ah (10Hr)

TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance


UPGRADE FOR

DRY BB3L-A ; BB3L-B

WEIGHT


Battery (with acid): Approx 1.20kg

MOUNTING ANGLE

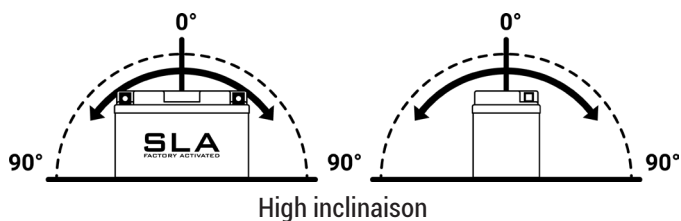


DIMENSIONS


Length (A):	98mm ±2mm
Width (B):	56mm ±2mm
Container height:	110mm ±2mm
Total height (C):	110mm ±2mm

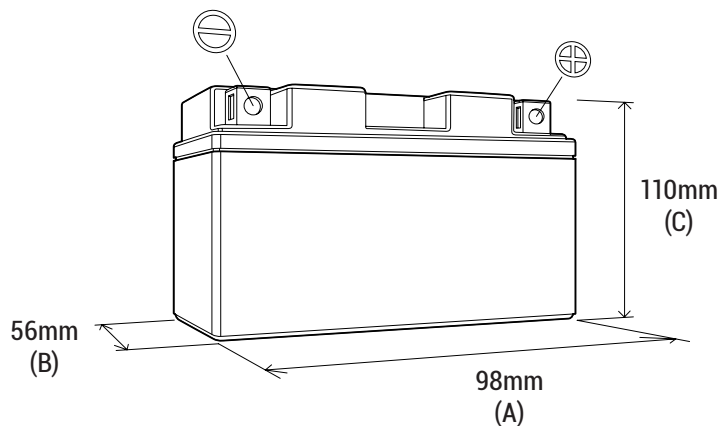


TERMINALS (mm)



FRONT



SIDE



TOP