

SLA
FACTORY ACTIVATED **MAX**

SLA MAX | PREMIUM QUALITY READY TO START

REF **BIX30HL****12v** VOLTAGE - V**440A** CCA - A (EN)**31.6Ah** CAPACITY - Ah (20Hr)**30Ah** CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- Increased power & Extended life
- Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling - Very safe

UPGRADE FOR

DRY BB30L-B
MF BIX30L-BS
SLA BIX30L

WEIGHT


Battery (with acid): approx 9.83kg

MOUNTING ANGLE




DIMENSIONS

Length (A): 166mm ±2mm
Width (B): 130mm ±2mm
Container height: 175mm ±2mm
Total height (C): 175mm ±2mm

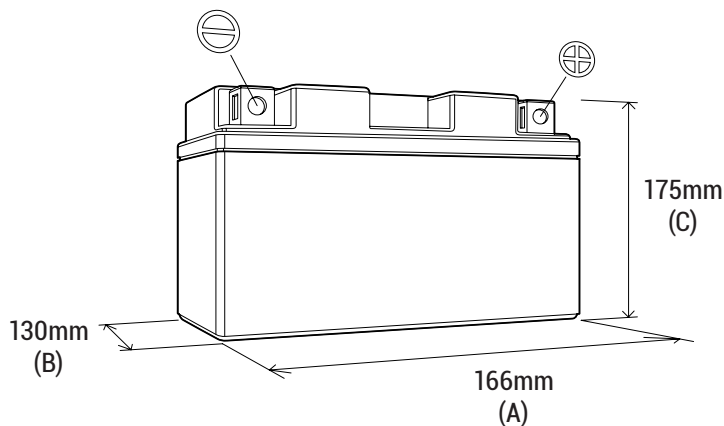

TERMINALS (mm)



FRONT



SIDE



TOP