

SLA MAX
FACTORY ACTIVATED

SLA MAX | PREMIUM QUALITY READY TO START

REF **BTX20HL****12v** VOLTAGE - v**310A** CCA - A (EN)**21.1Ah** CAPACITY - Ah (20Hr)**20Ah** CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- Increased power & Extended life
- Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling - Very safe

UPGRADE FOR

DRY BB18L-A
MF BTX20L-BS ; BTX20HL-BS
SLA BTX20HL

WEIGHT


Battery (with acid): approx 6.50kg

MOUNTING ANGLE


High inclinaison

DIMENSIONS

Length (A): 176mm ±2mm
Width (B): 87mm ±2mm
Container height: 153mm ±2mm
Total height (C): 153mm ±2mm

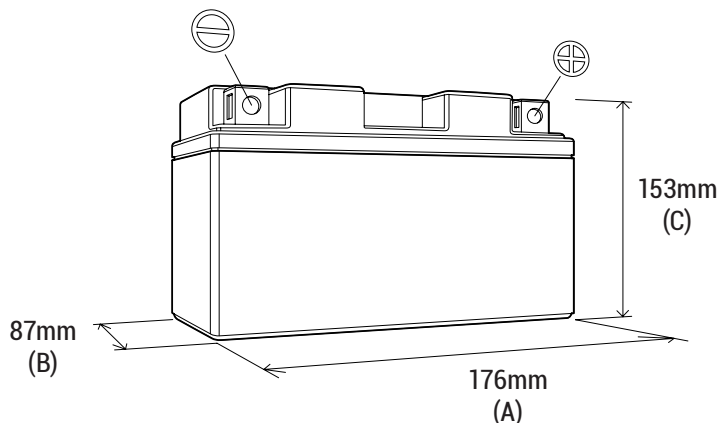


TERMINALS (mm)



FRONT



SIDE



TOP