

MF
BATTERY

MF | MAINTENANCE FREE

REF **BTX15L-BS**

12V VOLTAGE - V

230A CCA - A

13.7Ah CAPACITY - Ah (20Hr)

13Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM

FEATURES

- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold


UPGRADE FOR

WEIGHT

Battery (with acid):

Approx 4.71kg


MOUNTING ANGLE

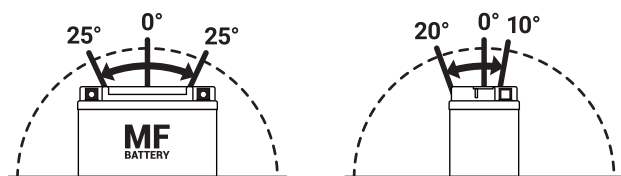

Medium inclinaison

DIMENSIONS

Length (A): 175mm ±2mm
 Width (B): 87mm ±2mm
 Container height: 130mm ±2mm
 Total height (C): 130mm ±2mm

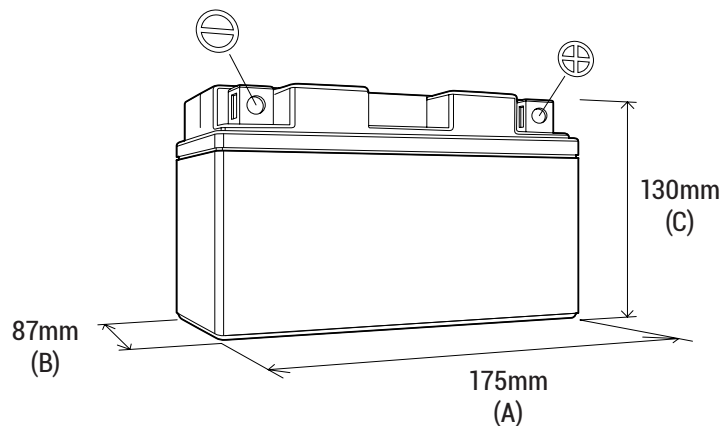

TERMINALS (mm)

