

**DRY**  
BATTERY

**DRY | CONVENTIONAL**

 REF **SB50-N18L-A**

**12v** VOLTAGE - V

**250A** CCA - A

**21.1Ah** CAPACITY - Ah (20Hr)

**20Ah** CAPACITY - Ah (10Hr)

**TECHNOLOGY**

- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

**FEATURES**

- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

**UPGRADE FOR**
**WEIGHT**



Battery (with acid): Approx 6.53kg

**MOUNTING ANGLE**



Upright installation only

**DIMENSIONS**


Length (A):	205mm ±2mm
Width (B):	90mm ±2mm
Container height:	162mm ±2mm
Total height (C):	162mm ±2mm

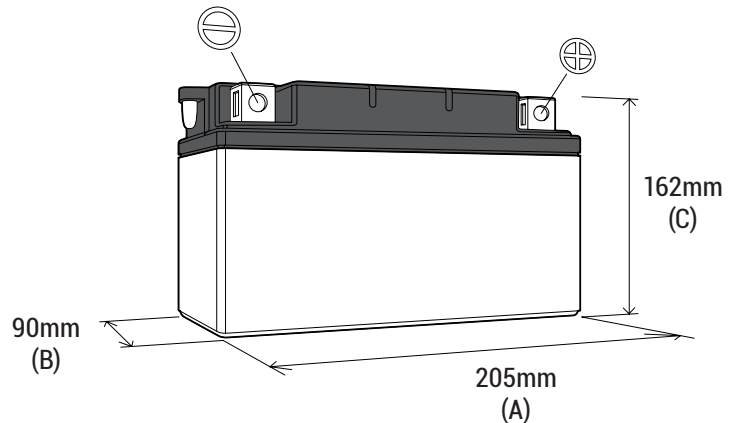
**TERMINALS (mm)**


FRONT



SIDE



TOP