

DRY
BATTERY

DRY | CONVENTIONAL

 REF **BB4L-B**

12v VOLTAGE - V

50A CCA - A

4.2Ah CAPACITY - Ah (20Hr)

4Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

FEATURES

- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

UPGRADE FOR
WEIGHT

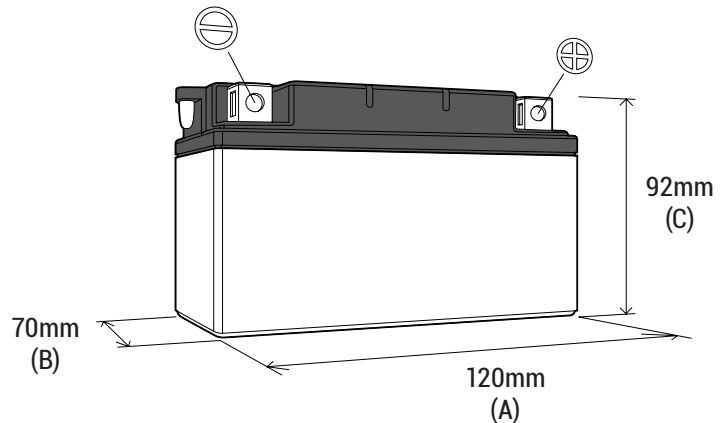
Battery (with acid): Approx 1.61kg

MOUNTING ANGLE


Upright installation only

DIMENSIONS

Length (A):	120mm ±2mm
Width (B):	70mm ±2mm
Container height:	92mm ±2mm
Total height (C):	92mm ±2mm


TERMINALS (mm)
