

DRY
BATTERY

DRY | CONVENTIONAL

 REF **BB12AL-A**

12v VOLTAGE - V

155A CCA - A

12.6Ah CAPACITY - Ah (20Hr)

12Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

FEATURES

- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

UPGRADE FOR
WEIGHT



Battery (with acid): Approx 4.15kg

MOUNTING ANGLE



Upright installation only

DIMENSIONS


Length (A):	134mm ±2mm
Width (B):	81mm ±2mm
Container height:	160mm ±2mm
Total height (C):	160mm ±2mm

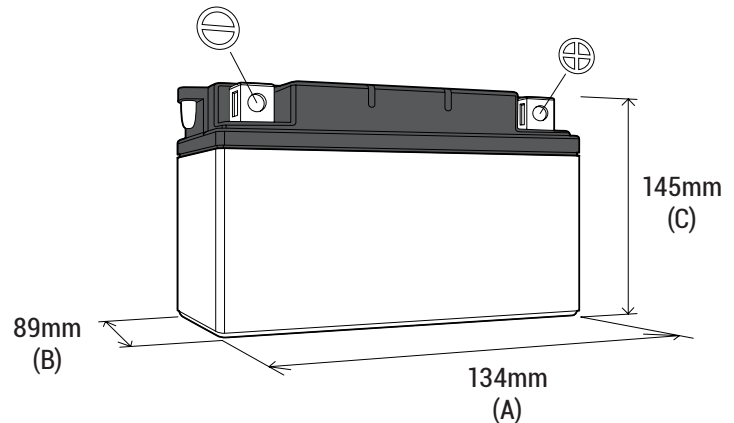
TERMINALS (mm)


FRONT



SIDE



TOP