


Ref: **U1-12** (12V 29Ah)



Dimensions (mm)

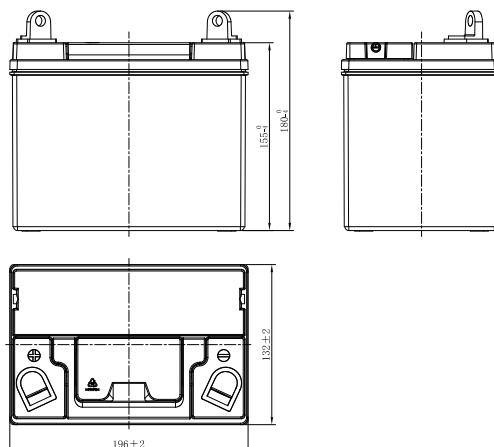


Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		29Ah
Dimension	Length	196±2mm(7.72inches)
	Width	132±2mm(5.20inches)
	Container Height	155+0/-4mm(6.10inches)
	Total Height(with Terminal)	180+0/-4mm(7.09inches)
Weight		Approx 8.42Kg(18.57lbs)
Acid		1.280±0.015g/cm ³ (25°C)
Standard Terminal		4
Cell layout		1
Hold-Down		B0
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		Black-PP Material
QTY/PLT/layer		/

Electrical Specification


Rated Capacity	20 hour rate(1.45A)	29Ah
Reserve Capacity		41min
Cold Cranking Performance Amps@0°F(-18°C)		355A

Discharge Characteristics(25°C,77°F)

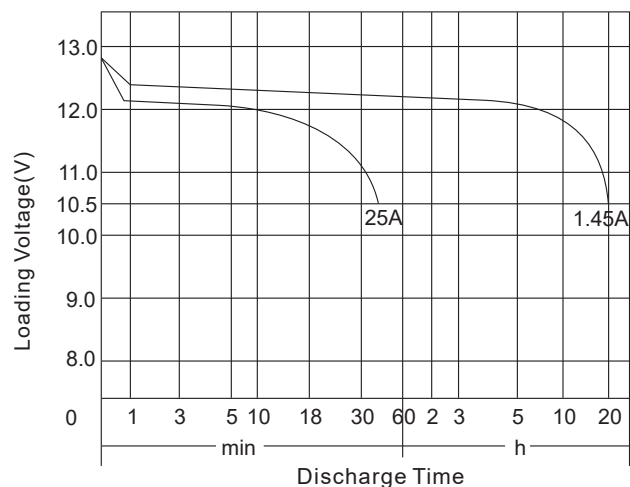


Standard Terminal (mm)

Cell Layout

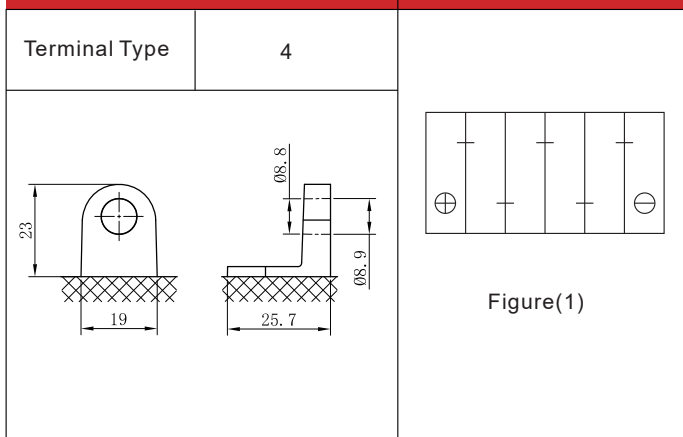

Discharge Characteristics(-18°C,0°F)

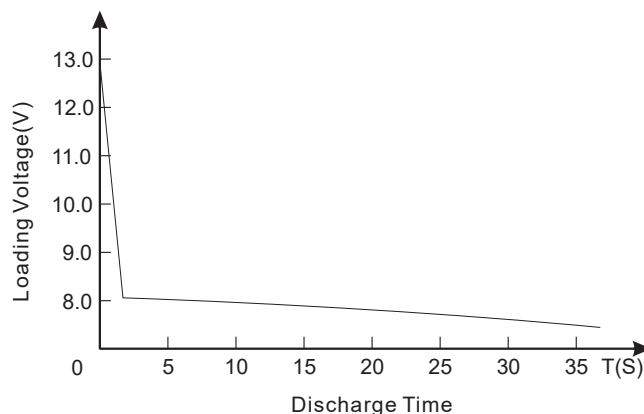

*Values are subject to variation of +/- 5% in normal manufacturing processes.

*Technical specifications and the product line above could be changed without prior notice.