

SLA MAX | INCREASED POWER



ORIGINAL EQUIPMENT
OEM
MANUFACTURER

**plug
and
play**


- Factory activated**
AGM (Absorbent Glass mat) technology
- Ready to use**
Just plug & play
- No maintenance**
VRLA (Valve Regulated Lead Acid) design
- Spillproof design**
Factory sealed & electrolyte held in a glass fibre mat
- No acid handling**
Very safe
- Maximum starting power & extended cycle life**
10% higher than SLA CCA
- Extreme vibration resistance***
Reinforced battery case
- Superior capacity**
10% higher than SLA capacity

SLA MAX (Sealed Lead Acid) batteries are designed to offer maximal performance to big engine bikes equipped with high electrical energy requirements. Ready to use, the SLA MAX batteries are Factory Activated, completely spill proof and required no maintenance. AGM (Absorbent Glass Mat) technology combined with new highly sophisticated construction design provide increased power, extended life and maximum reliability.

COMPATIBLE CHARGERS

- BS 10** Battery size up to 20Ah
- BS 15** Battery size up to 30Ah
- BS 30** Battery size up to 60Ah
- BS 60** Battery size up to 120Ah
- BK 20** Battery size up to 40Ah

MOUNTING ANGLES

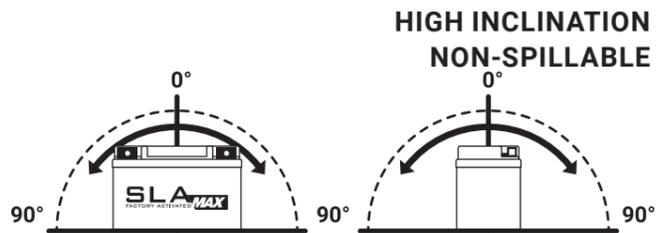

DID YOU KNOW?

SLA MAX range is a perfect solution for ATV, UTV, SSV, watercraft & snowmobile too!

BS BATTERY SLA MAX range is suitable for e-commerce (air freight, road or sea shipment).

TECHNICAL FEATURES | SLA MAX

FOR BMW

Developed to fit BMW latest bikes, these SLA MAX models are designed to offer maximal performance with increased capacity and high starting power.

12V	BS BATTERY TYPE	BS CODE	CAPACITY Ah (10Hr)	CAPACITY Ah (20Hr)	CCA (EN) A (-18°C)	DIMENSIONS (±2mm)			ASSEMBLY LAYOUT	TERMINAL
						L	W	H		
	BTX14H *	300887	14	14.7	220	150	87	145		
	BTX16H *	300896	14	16	250	150	87	161		
	51913	300860	21	22	275	182	77	168		

FOR POLARIS & INDIAN

Developed to fit Indian latest bikes, SLA MAX BTX14AH provides increased power, extended life and maximum reliability.

12V	BS BATTERY TYPE	BS CODE	CAPACITY Ah (10Hr)	CAPACITY Ah (20Hr)	CCA (EN) A (-18°C)	DIMENSIONS (±2mm)			ASSEMBLY LAYOUT	TERMINAL
						L	W	H		
	BTX14AH *	300863	13	13.7	240	134	89	164		

FOR HARLEY DAVIDSON

SLA MAX HD models have reinforced casing for a maximum vibration resistance and equipped with specific terminals to fit the mounting without using spacer rings. Ideal for Heavy Duty engines requirements.

12V	BS BATTERY TYPE	BS CODE	CAPACITY Ah (10Hr)	CAPACITY Ah (20Hr)	CCA (EN) A (-18°C)	DIMENSIONS (±2mm)			ASSEMBLY LAYOUT	TERMINAL
						L	W	H		
	BTX14HL	300882	14	14.7	220	150	87	145		
	BTX20HL	300883	20	21.1	310	176	87	154		
	BIX30HL	300884	30	31.6	440	166	130	175		



Battery case with a grid framework for a maximum vibration resistance



Terminal specifically designed to facilitate the mounting on Heavy Duty motorcycles



BTX20HL & BIX30HL terminal with front and top connections



BTX14HL terminals

* Models manufactured and designed according to OEM specifications