## BATTERY DATA SHEET





### **SLA MAX | PREMIUM QUALITY READY TO START**



# REF BGZ32HL











#### **TECHNOLOGY**

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

#### **FEATURES**

- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- · Increased power & Extended life
- · Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- · No acid handling Very safe

#### **UPGRADE FOR**

DRY BB30L-B BIX30L-BS


SLA BTX30L | SLA MAX BIX30HL

#### **WEIGHT**

Battery (with acid):

approx 10.38kg


#### MOUNTING ANGLE

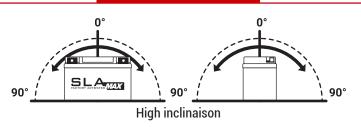


#### **DIMENSIONS**

Length (A): Width (B): Container height: Total height (C):

170mm ±2mm 132mm ±2mm 175mm ±2mm 175mm ±2mm

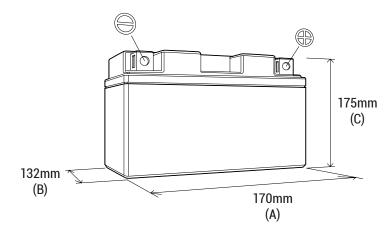

#### TERMINALS (mm)



Top View