# BATTERY DATA SHEET





















#### **TECHNOLOGY**


- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

#### **FEATURES**

- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- · Increased power & Extended life
- · Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling Very safe

**DIMENSIONS** 

Length (A): Width (B): Container height: Total height (C): 150mm ±2mm 88.5mm ±2mm 145mm ±2mm 145mm ±2mm

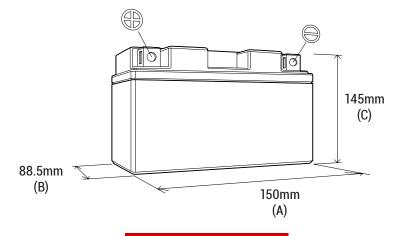

#### **UPGRADE FOR**


MF BTX14-BS SLA BTX14 SLA MAX BTX14H

# **WEIGHT**

Battery (with acid):

approx 5.48kg

## MOUNTING ANGLE

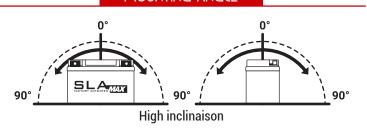

### TERMINALS (mm)

