

SLA MAX
FACTORY ACTIVATED

SLA MAX | PREMIUM QUALITY READY TO START

REF

BGZ20HL**12v**

VOLTAGE - V

320A

CCA - A (EN)

21.1Ah

CAPACITY - Ah (20Hr)

20Ah

CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- Increased power & Extended life
- Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling - Very safe

UPGRADE FOR

DRY BB18L-A


MF BTX20L-BS ; BTX20HL-BS

SLA BTX20HL | SLA MAX BTX20HL

WEIGHT


Battery (with acid): approx 6.63kg

MOUNTING ANGLE

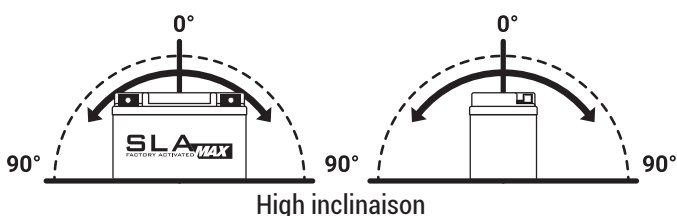

DIMENSIONS

| | |
|-------------------|------------|
| Length (A): | 176mm ±2mm |
| Width (B): | 89mm ±2mm |
| Container height: | 154mm ±2mm |
| Total height (C): | 154mm ±2mm |

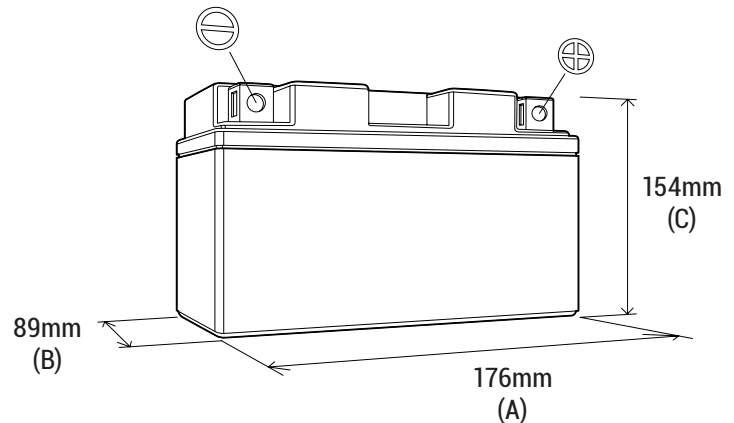

TERMINALS (mm)

