

SLA MAX
FACTORY ACTIVATED

SLA MAX | PREMIUM QUALITY READY TO START

REF

BGZ32HL**12v****VOLTAGE - V****500A****CCA - A (EN)****33.7Ah****CAPACITY - Ah (20Hr)****32Ah****CAPACITY - Ah (10Hr)****TECHNOLOGY**

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

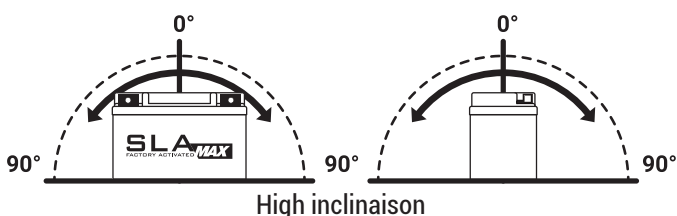
- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- Increased power & Extended life
- Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling - Very safe

UPGRADE FOR

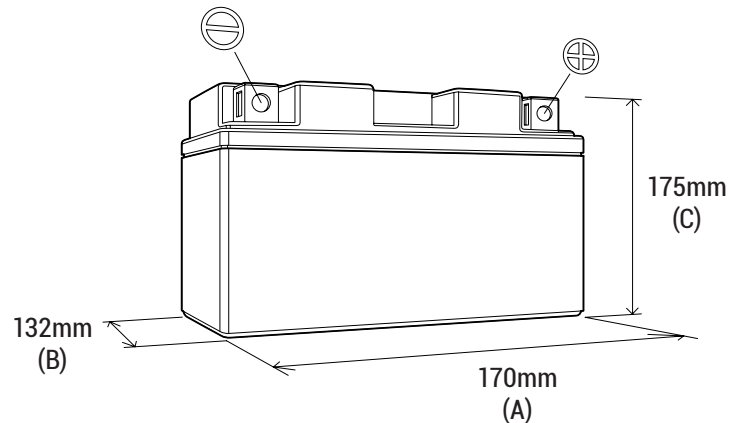

DRY BB30L-B
MF BIX30L-BS
SLA BTX30L | SLA MAX BIX30HL

WEIGHT


Battery (with acid): approx 10.38kg

MOUNTING ANGLE**DIMENSIONS**


Length (A): 170mm ±2mm
Width (B): 132mm ±2mm
Container height: 175mm ±2mm
Total height (C): 175mm ±2mm

**TERMINALS (mm)**

Front View



Side View



Top View