BATTERY DATA SHEET







FACTORY ACTIVATED 1/4X



REF BGZ32HL









TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- · Increased power & Extended life
- Low discharge rate
- Absolutely maintenance free
- · Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling Very safe

UPGRADE FOR

DRY BB30L-B
MF BIX30L-BS


SLA BTX30L | SLA MAX BIX30HL

WEIGHT

Battery (with acid):


approx 10.38kg

MOUNTING ANGLE

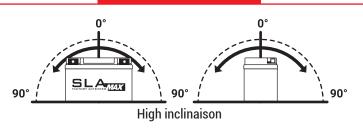


DIMENSIONS

Length (A): Width (B): Container height: Total height (C): 170mm ±2mm 132mm ±2mm 175mm ±2mm 175mm ±2mm

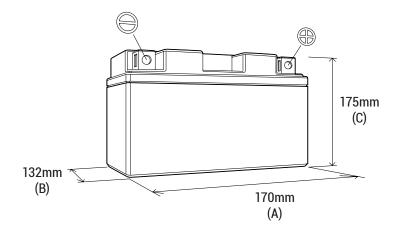

TERMINALS (mm)



Top View