

LITHIUM

LiFePO4

MAX

LITHIUM (LiFePO4) | High Performance

REF **BSLi-10 MAX**



TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


FEATURES

- Fast charging
- Multi-positionning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230°C
- Lighter weight

REPLACEMENTS

LITHIUM	SLA	MF	DRY
BSLi-10	BTX20HL	BTX20L-BS	BB18L-A
	BTX24HL/	BTX20HL-BS	B50-N18L-A
	B50N15L-A/	BTX24HL-BS	B50-N18L-A2/
	A2/A3		A3/AT

MOUNTING ANGLE

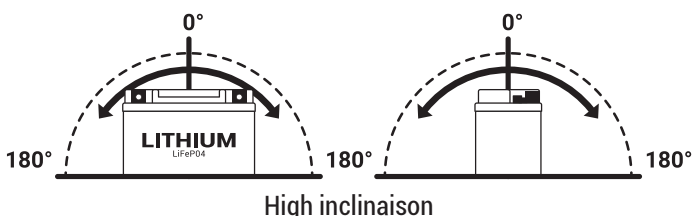

NON-SPILLABLE

12_v VOLTAGE

180_{Wh} ENERGY


750_A CCA

OPERATING TEMP. RANGE

Charge temperature:	0°C to 45°C
Discharge temperature:	-20°C to 55°C
Storage temperature:	0°C to 30°C

DIMENSIONS & WEIGHT

Length (L):	175mm ±1mm
Width (W):	87mm ±1mm
Height (H):	155mm ±1mm
Weight	2.70kg (tolerance ±3%)

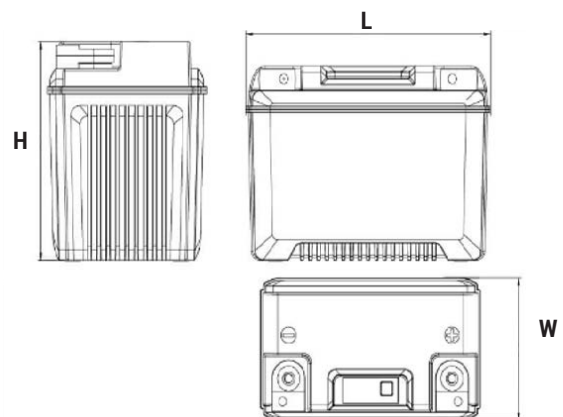

TERMINALS (mm)

