

# LITHIUM

LiFePO4

**MAX**

LITHIUM (LiFePO4) | High Performance

REF

# BSLi-12 MAX



## TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


## FEATURES

- Fast charging
- Multi-positionning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230°C
- Lighter weight

## REPLACEMENTS

LITHIUM	SLA	MF	DRY
BSLi-12	BIX30L	BIX30L-BS	BB30L-B
	BIX30HL		BB30CL-B
	53030		B60-N30L-A
			12N24-3A
			52515
			53030

## MOUNTING ANGLE

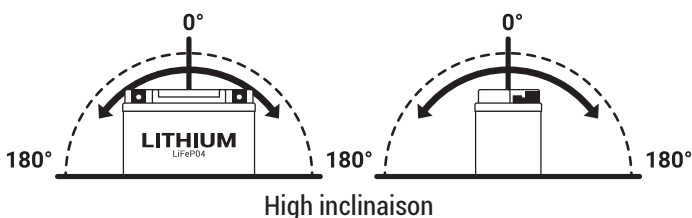

**NON-SPILLABLE**

**12<sub>v</sub>** VOLTAGE

**216<sub>Wh</sub>** ENERGY


**900<sub>A</sub>** CCA

## OPERATING TEMP. RANGE

Charge temperature:	0°C to 45°C
Discharge temperature:	-20°C to 55°C
Storage temperature:	0°C to 30°C

## DIMENSIONS & WEIGHT

Length (L):	166mm ±1mm
Width (W):	127mm ±1mm
Height (H):	175mm ±1mm
Weight	3.04kg (tolerance ±3%)

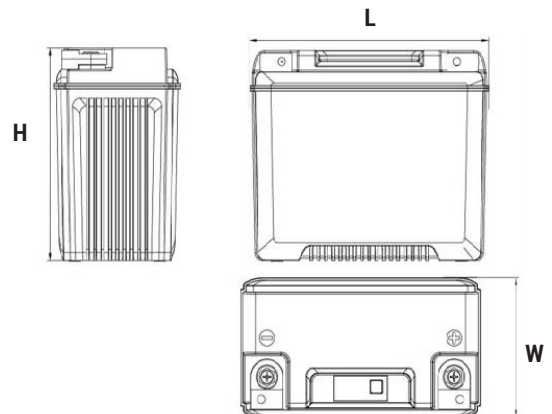

## TERMINALS (mm)

