


# DRY | CONVENTIONAL



Conventional batteries are lead acid flooded batteries. These batteries need to be filled before first use. Conventional High Performance batteries include a sulfation retardant technology which reduces battery-killing plate sulfation. This results in a longer battery life, especially in standby or storage mode. These batteries are perfectly suitable for ATVs (All Terrain Vehicles), UTVs (Utility Vehicles) and lawnmowers.



Acid pack included for activation

## COMPATIBLE CHARGERS

**BS 10** Battery size up to 20Ah

**BS 15** Battery size up to 30Ah

**BS 30** Battery size up to 60Ah

**BS 60** Battery size up to 120Ah

**BK 20** Battery size up to 40Ah



**Acid pack included**  
For initial filling



**Periodic maintenance**  
Refilled with water if necessary



**Handle with care to prevent acid spillage**



**Long shelf life**  
No need to be recharged while stocked






**Internal gas emission through venting hole**



**Wide variety of 6V & 12V models**

## MOUNTING ANGLES

UPRIGHT INCLINATION ONLY

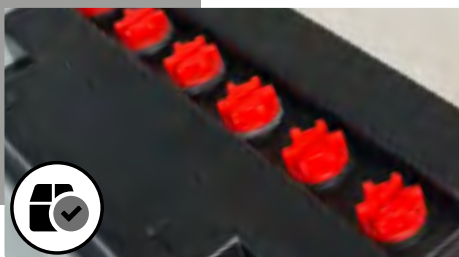

## DID YOU KNOW?

Since February 1<sup>st</sup>, 2021, the regulation (EU) 2019/1148 prohibits the sale of acid batteries to the public in Europe.

DRY batteries can be stored for several years, as it is a dry-charged battery.

# TECHNICAL FEATURES | DRY

12V

BS BATTERY TYPE	BS CODE	CAPACITY AH (10HR)	CAPACITY AH (20HR)	CCA A (-18°C)	DIMENSIONS (±2MM)			ASSEMBLY LAYOUT	TERMINAL
					L	W	H		
<b>BB12A-A</b> (12N12A-4A-1)	310561	12	12.6	155	134	80	160		
<b>BB14L-A2</b> (12N14-3A)	310569	14	14.7	175	134	89	166		
<b>BB14-A2</b> (12N14-4A)	310567	14	14.7	175	134	89	166		
<b>B50-N18L-A/A2/12N18-3A</b>	310547	20	21.1	250	205	90	162		
<b>12N24-3A</b>	310539	24	25.2	220	184	124	175		
<b>12N24-4A</b>	310540	24	25.2	220	184	124	175		
<b>U1-9</b>	310691	24	25.2	220	195	130	180		
<b>U1R-9</b>	310810	24	25.2	220	195	130	180		
<b>U1-12</b>	310744	30	31.6	280	195	130	180		
<b>U1R-12</b>	310870	30	31.6	280	195	130	180		
<b>B60-N24L-A</b>	310658	28	29.5	280	184	124	175		
<b>53030</b> (B60-N30L-A)	310544	-	30	300	184	130	170		

# BATTERY RANGE OVERVIEW

## COMPARATIVE CHART



	<b>LITHIUM</b> LiFePO4	<b>SLA</b> FACTORY ACTIVATED	<b>DRY</b> BATTERY	<b>VRLA</b> BATTERY
PLUG & PLAY	✓	✓	-	✓
NO ACID HANDLING	✓	✓	-	✓
NO MAINTENANCE	✓	✓	-	✓
NON-SPILLABLE	✓	✓	-	✓
FACTORY ACTIVATED	✓	✓	-	✓
MULTI-POSITIONING FITMENT	✓	✓	-	✓
EASY TO CARRY	✓	✓	-	✓
EASY TO SHIP	✓	✓	-	✓
NO SELF DISCHARGE DURING STORAGE	-	-	✓	-
SUITABLE FOR E-COMMERCE COMPLIANT WITH EU REGULATION 2019/1148 (FOR THE SALE OF ACID FOR BATTERIES)	✓	✓	-	✓

## TRANSPORTATION CHART

TRANSPORT TYPE				
	SUITABLE FOR E-COMMERCE		UNDER CERTAIN CONDITION	SUITABLE FOR E-COMMERCE

(1) Once activated

(2) According to ADR, IMDG & IATA regulations