

## LITHIUM LiFePO4

LITHIUM (LiFePO4) | High Performance

REF **BSLi-08**



**12<sub>v</sub>** VOLTAGE

**60<sub>Wh</sub>** ENERGY

**300<sub>A</sub>** CCA - A (EN)

### TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


### FEATURES

- Fast charging
- Multi-positioning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230°C
- Lighter weight

### REPLACEMENTS

SLA	MF	DRY	DRY
BTX14L	BTX14L-BS	BB16L-B	-
BTX14HL	BTX15L-BS	BB16HL-A-CX	
BB16CL-B		BB16CL-B	
		BB18L-A	

### MOUNTING ANGLE

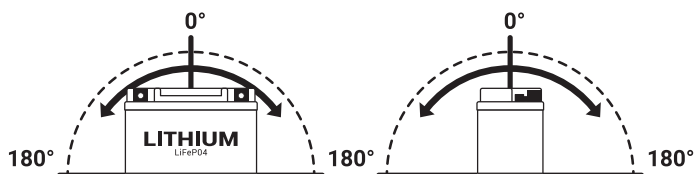

High inclinasion


**NON-SPILLABLE**

### OPERATING TEMP. RANGE

Charge temperature:	0°C to 45°C
Discharge temperature:	-20°C to 55°C
Storage temperature:	0°C to 30°C

### DIMENSIONS & WEIGHT

Length (L):	148mm ±1mm
Width (W):	86mm ±1mm
Height (H):	105mm ±2mm
Weight:	1.16kg (tolerance ±3%)

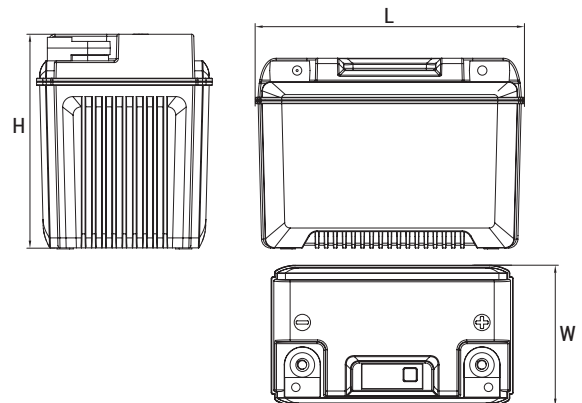

### TERMINALS (mm)

