

SLA
FACTORY ACTIVATED

SLA | READY TO START

REF **BB5L-B****12v****VOLTAGE - V****65A****CCA - A (EN)****5.3Ah****CAPACITY - Ah (20Hr)****5Ah****CAPACITY - Ah (10Hr)****TECHNOLOGY**

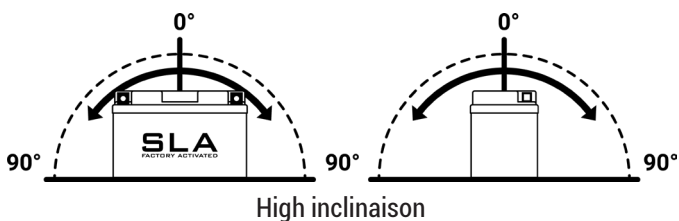
- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

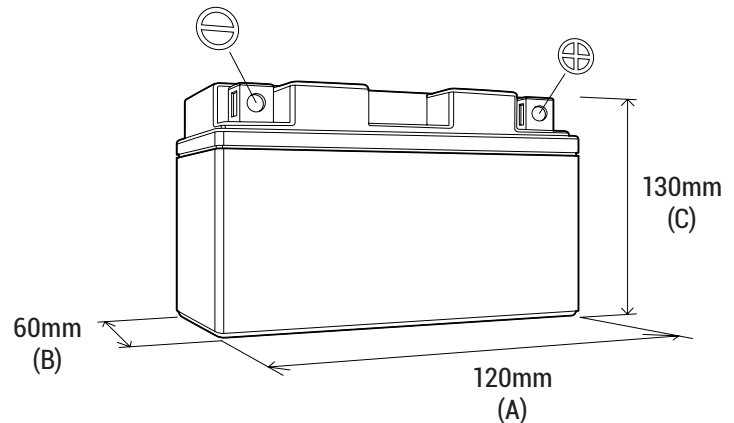



- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance

UPGRADE FOR**DRY** BB5L-B ; 12N5-3B**WEIGHT**

Battery (with acid): Approx 2.00kg

MOUNTING ANGLE**DIMENSIONS**

| | |
|-------------------|------------|
| Length (A): | 120mm ±2mm |
| Width (B): | 60mm ±2mm |
| Container height: | 130mm ±2mm |
| Total height (C): | 130mm ±2mm |

**TERMINALS (mm)****FRONT****SIDE****TOP**