

**SLA**  
FACTORY ACTIVATED

SLA | READY TO START

**BTX14AH**  
REF **BB14-A2/B2**

**12V** VOLTAGE - V

**210A** CCA - A (EN)

**14.7Ah** CAPACITY - Ah (20Hr)

**14Ah** CAPACITY - Ah (10Hr)

## TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

## FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance


## UPGRADE FOR

DRY BB14-A2 ; 12N14-4A ; BB14-B2  
MF BTX14AH-BS

## WEIGHT


Battery (with acid): Approx 4.40kg

## MOUNTING ANGLE

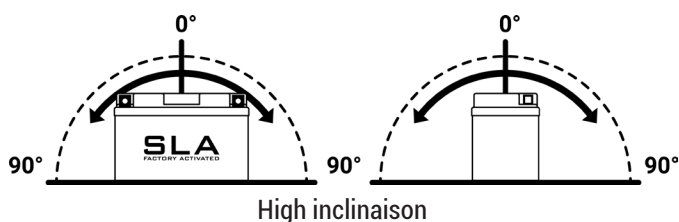

## DIMENSIONS

Length (A): 135mm ±2mm  
Width (B): 90mm ±2mm  
Container height: 164mm ±2mm  
Total height (C): 164mm ±2mm

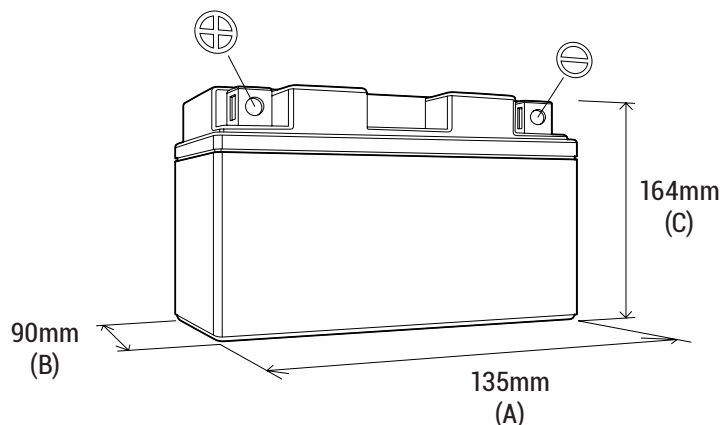

## TERMINALS (mm)

