BATTERY DATA SHEET





SLA MAX | PREMIUM QUALITY READY TO START

FACTORY ACTIVATED



REF BGZ20H









TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- · Activated and pre-charged batteries
- Homologated by OEM


FEATURES

- Factory activated: Ready-to-start battery
- Totally sealed
- Safe & Environmentally friendly
- Superior capacity
- · Increased power & Extended life
- · Low discharge rate
- Absolutely maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Extreme vibration resistance
- Spillproof design
- Multi-positional fitment
- No acid handling Very safe

Length (A):

Width (B): Container height: Total height (C): 176mm ±2mm 89mm ±2mm 154mm ±2mm

154mm ±2mm

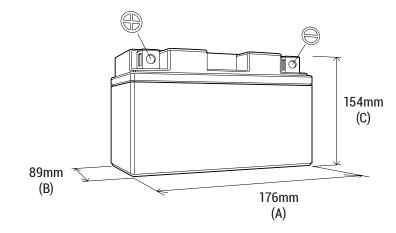

DIMENSIONS

UPGRADE FOR


MF BTX20-BS SLA BTX20

WEIGHT

Battery (with acid):

approx 6.96kg

MOUNTING ANGLE

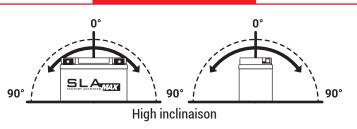

TERMINALS (mm)

