

SLA
FACTORY ACTIVATED **MAX**

SLA | READY TO START

REF **U1-500**

TECHNOLOGY

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES


- Factory activated AGM (Absorbent Glass Mat) technology.
- Ready to use
Just plug & play.
- No maintenance
VRLA (Valve Regulated Lead Acid) design.
- Spill-proof design
Factory sealed & electrolyte held in a glass fiber mat.
- No acid handling
Very safe.
- Extreme vibration resistance
Reinforced battery case.
- Maximum starting power & extended cycle life
40% higher than SLA CCA.
- Superior capacity
30% higher than SLA capacity.

UPGRADE FOR

WEIGHT


Battery (with acid): Approx 10.05kg (22.04lbs)

MOUNTING ANGLE

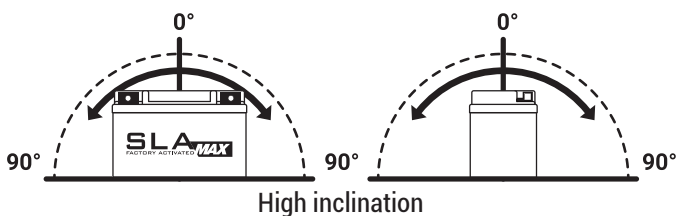**12v** VOLTAGE - V**500A** CCA - A**31.6Ah** CAPACITY - Ah (20Hr)**30.0Ah** CAPACITY - Ah (10Hr)

DIMENSIONS

Length (A): 195mm (7.67inch) ±2mm
 Width (B): 125mm (4.92inch) ±2mm
 Container height: 156mm (6.14inch) ±2mm
 Total height (C): 176mm (6.92inch) ±2mm

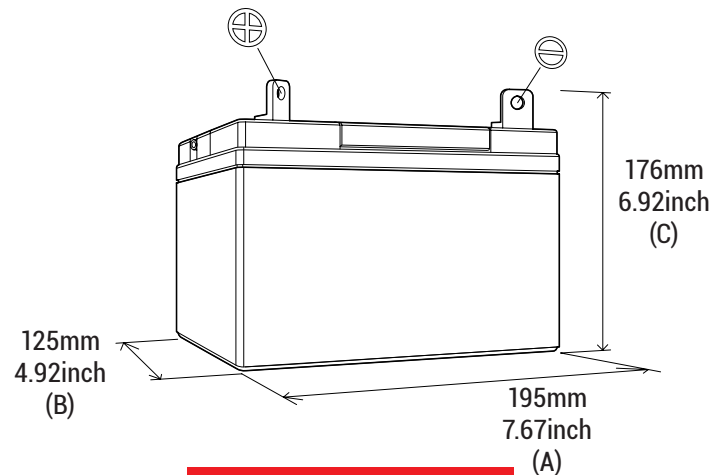

TERMINALS (mm)

