

# LITHIUM

LiFePO4

LITHIUM (LiFePO4) | High Performance

REF **BSLi-03**



**12<sub>v</sub>** VOLTAGE

**36<sub>Wh</sub>** ENERGY

**210<sub>A</sub>** CCA - A (EN)

## TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


## FEATURES

- Fast charging
- Multi-positioning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230°C
- Lighter weight

## REPLACEMENTS

SLA	MF	DRY
BB7-A	BTX7A-BS	12N7-4A
BB9-B	BT7B-BS	12N9-4B-1
BTX7A	BT9A-BS	BB7-A
BTX9	BT9B-BS	BB9-B
BT7B-4	BTX9-BS	
BT9B-4		

## MOUNTING ANGLE

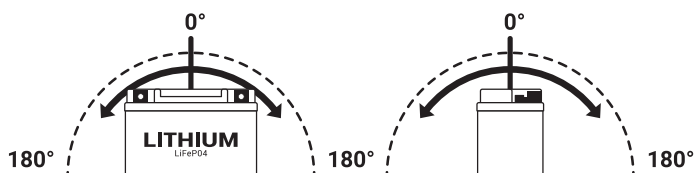

High inclinaison


**NON-SPILLABLE**

## OPERATING TEMP. RANGE

Charge temperature:	0°C to 45°C
Discharge temperature:	-20°C to 55°C
Storage temperature:	0°C to 30°C

## DIMENSIONS & WEIGHT

Length (L):	134mm ±1mm
Width (W):	65mm ±1mm
Height (H):	92mm ±2mm
Weight:	0.78kg (tolerance ±3%)

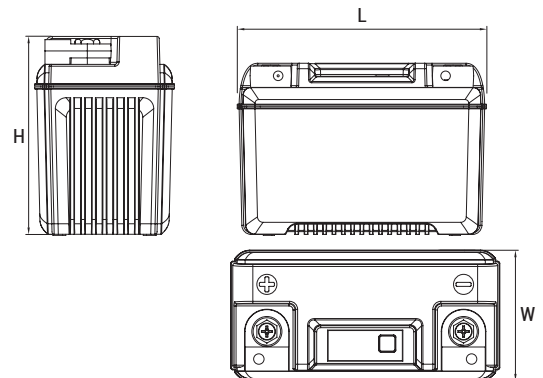

## TERMINALS (mm)

