

MF BATTERY

MF | MAINTENANCE FREE

REF

BTX12-BS



12v

VOLTAGE - V

180A

CCA - A

10.5Ah

CAPACITY - Ah (20Hr)

10Ah

CAPACITY - Ah (10Hr)

TECHNOLOGY

- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM

FEATURES

- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold

UPGRADE FOR

WEIGHT

Battery (with acid):

Approx 3.96kg


MOUNTING ANGLE



Medium inclinaison

DIMENSIONS

Length (A):	150mm ±2mm
Width (B):	87mm ±2mm
Container height:	130mm ±2mm
Total height (C):	130mm ±2mm

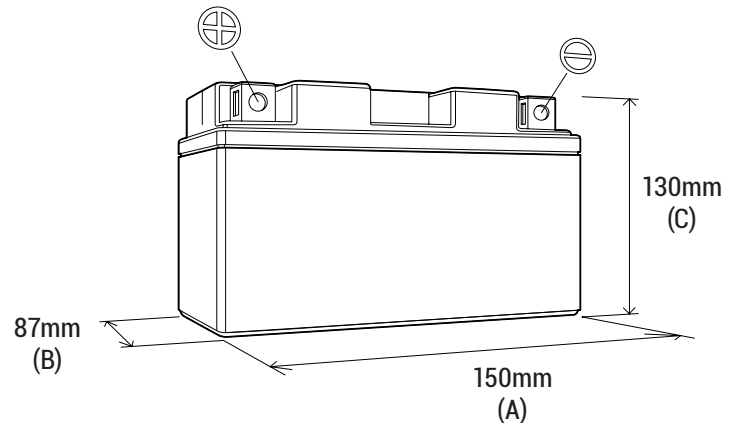

TERMINALS (mm)

