

SLA
FACTORY ACTIVATED

SLA | READY TO START

REF **BTX4L+/BTZ5S**

12v

VOLTAGE - V

65A

CCA - A (EN)

4.2Ah

CAPACITY - Ah (20Hr)

4Ah

CAPACITY - Ah (10Hr)

TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance


UPGRADE FOR

MF BTX4L-BS+/BTZ5S-BS

WEIGHT


Battery (with acid): Approx 1.44kg

MOUNTING ANGLE

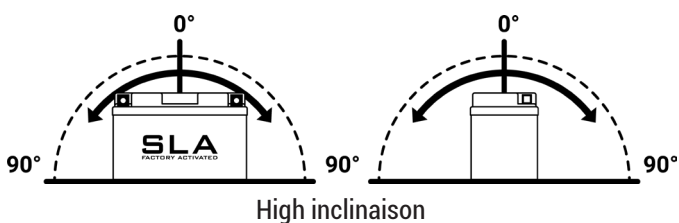

DIMENSIONS

Length (A):	113mm ±2mm
Width (B):	70mm ±2mm
Container height:	85mm ±2mm
Total height (C):	85mm ±2mm

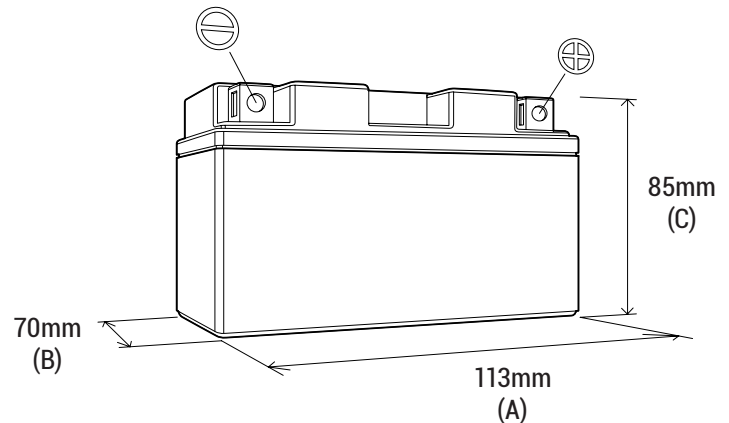

TERMINALS (mm)

FRONT

SIDE

TOP