

**SLA**  
FACTORY ACTIVATED

SLA | READY TO START

REF **BTX9****12v**

VOLTAGE - V

**135A**

CCA - A (EN)

**8.4Ah**

CAPACITY - Ah (20Hr)

**8Ah**

CAPACITY - Ah (10Hr)

## TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

## FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance

## UPGRADE FOR


MF BTX9-BS

## WEIGHT

Battery (with acid):


Approx 3.06kg

## MOUNTING ANGLE

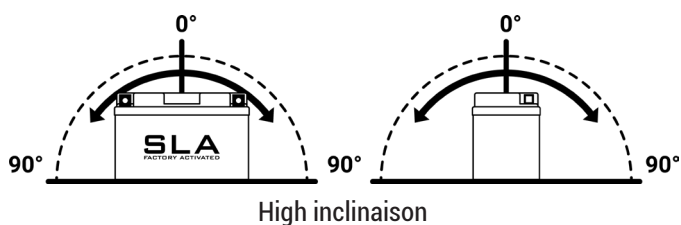

## DIMENSIONS

|                   |            |
|-------------------|------------|
| Length (A):       | 150mm ±2mm |
| Width (B):        | 87mm ±2mm  |
| Container height: | 105mm ±2mm |
| Total height (C): | 105mm ±2mm |

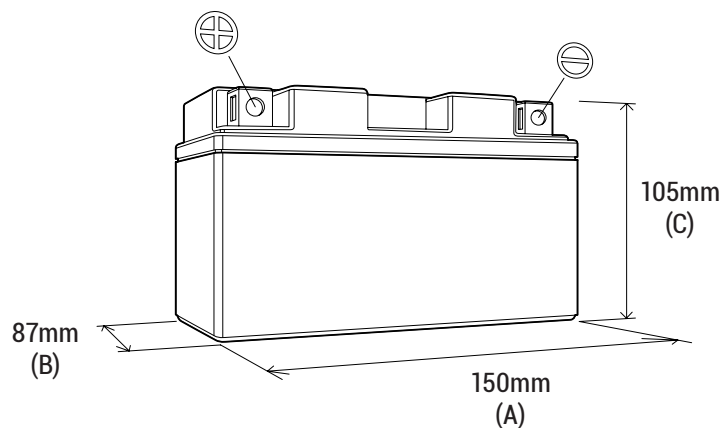

## TERMINALS (mm)

