

SLA
FACTORY ACTIVATED


SLA | READY TO START

BS Code: 300634

REF 53030

12V VOLTAGE - V

385A CCA - A

31.6Ah CAPACITY - Ah (20Hr)

30Ah CAPACITY - Ah (10Hr)

TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

DIMENSIONS

Length (A):

166mm ±2mm

Width (B):


126mm ±2mm

Container height:

173mm ±2mm

Total height (C):

173mm ±2mm

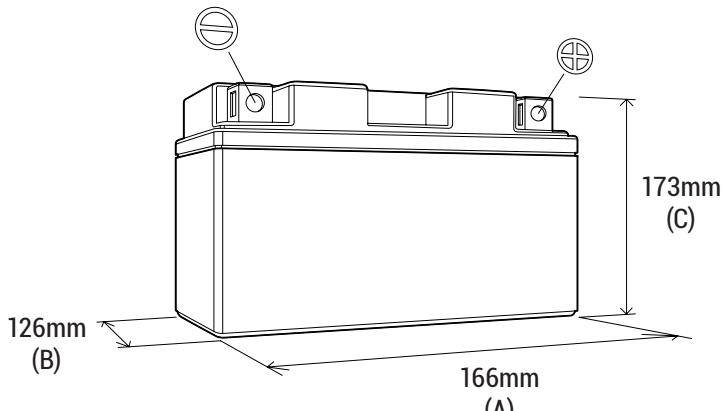

FEATURES

- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance

UPGRADE FOR

DRY BB30L-B ; 53030


MF BIX30L-BS

WEIGHT

Battery (with acid):

Approx 9.38kg

MOUNTING ANGLE

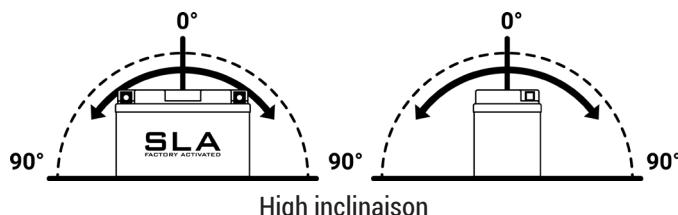

TERMINALS (mm)

