

12N6-3B

BS CODE: 310904

VOLTAGE **12V**

CCA **50A**


CAPACITY 20HR **6.3Ah**

CAPACITY 10HR **6.0Ah**



DIMENSIONS

| | | |
|---------------------|-------------|----------------|
| LENGTH | 137 ±2mm | 5.39 ±0.08inch |
| WIDTH | 72 ±2mm | 2.83 ±0.08inch |
| TOTAL HEIGHT | 95 ±2mm | 3.74 ±0.08inch |
| WEIGHT | 1.62 kg ±5% | 3.57 lbs ±5% |

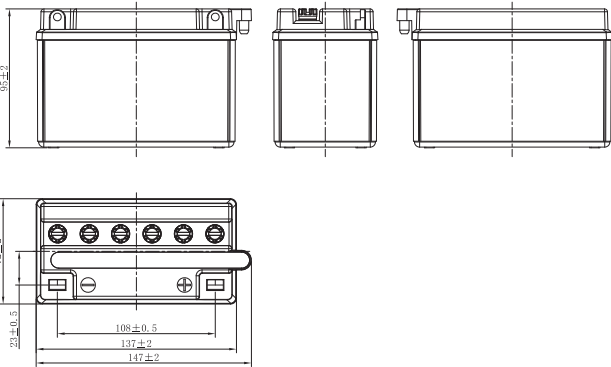


TERMINAL (mm)

| | | |
|-----------------|------|-----|
| POLARITY | | |
| | | |
| FRONT | SIDE | TOP |

DRY FEATURES

- TO BE ACTIVATED**
DRY-charged technology.
- ACID PACK INCLUDED**
For initial filling.
- PERIODIC MAINTENANCE**
Refilled with water if necessary.
- HANDLE WITH CARE TO PREVENT ACID SPILLAGE**
- LONG SHELF LIFE**
No need to be recharged while stocked (if not activated).
- INTERNAL GAS EMISSION THROUGH VENTING HOLE**
- WIDE VARIETY OF 6V & 12V MODELS**

MOUNTING ANGLE

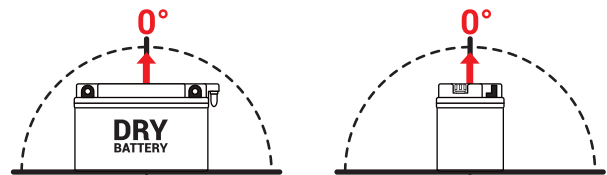

UPGRADE FOR

| SLA MAX | SLA | MF | DRY |
|---------|-----|----|-----|
| - | - | - | - |