

B50-N18L-A3

BS CODE: 310548

VOLTAGE **12V**

CCA **250A**


CAPACITY 20HR **21.1Ah**

CAPACITY 10HR **20.0Ah**



DIMENSIONS

LENGTH	205 ±2mm	8.07 ±0.08inch
WIDTH	90 ±2mm	3.54 ±0.08inch
TOTAL HEIGHT	162 ±2mm	6.38 ±0.08inch
WEIGHT	4.88 kg ±5%	10.76 lbs ±5%

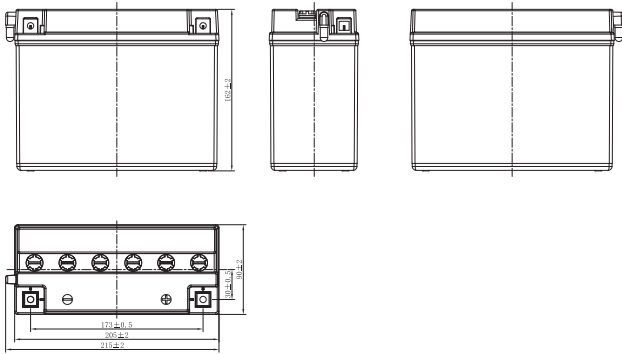


DRY FEATURES

- TO BE ACTIVATED**
DRY-charged technology.
- ACID PACK INCLUDED**
For initial filling.
- PERIODIC MAINTENANCE**
Refilled with water if necessary.
- HANDLE WITH CARE TO PREVENT ACID SPILLAGE**
- LONG SHELF LIFE**
No need to be recharged while stocked (if not activated).
- INTERNAL GAS EMISSION THROUGH VENTING HOLE**
- WIDE VARIETY OF 6V & 12V MODELS**

TERMINAL (mm)

POLARITY

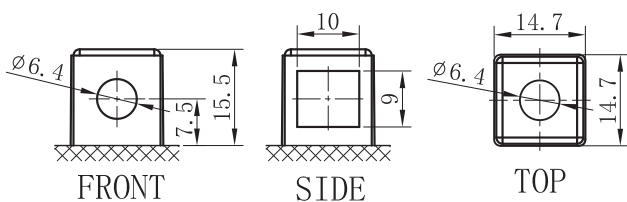

MOUNTING ANGLE



UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	-