

## B60-N24L-A

BS CODE: 310658

VOLTAGE **12V**

CCA **280A**


CAPACITY 20HR **29.5Ah**

CAPACITY 10HR **28.0Ah**



### DIMENSIONS

<b>LENGTH</b>	184 ±2mm	7.24 ±0.08inch
<b>WIDTH</b>	124 ±2mm	4.88 ±0.08inch
<b>TOTAL HEIGHT</b>	170 ±2mm	6.69 ±0.08inch
<b>WEIGHT</b>	5.5 kg ±5%	12.13 lbs ±5%

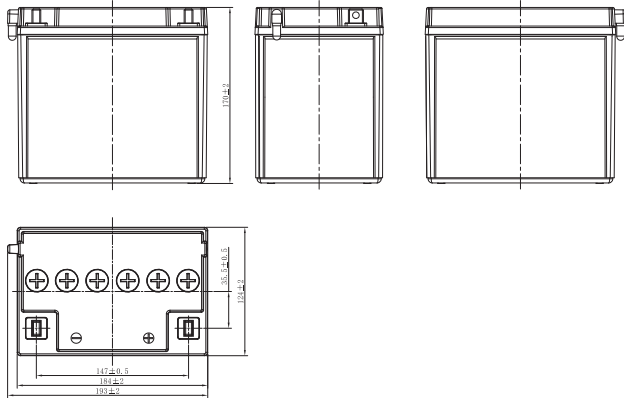


### TERMINAL (mm)

<b>POLARITY</b>		
<b>FRONT</b>	<b>SIDE</b>	<b>TOP</b>

### DRY FEATURES

- TO BE ACTIVATED**  
DRY-charged technology.
- ACID PACK INCLUDED**  
For initial filling.
- PERIODIC MAINTENANCE**  
Refilled with water if necessary.
- HANDLE WITH CARE TO PREVENT ACID SPILLAGE**
- LONG SHELF LIFE**  
No need to be recharged while stocked (if not activated).
- INTERNAL GAS EMISSION THROUGH VENTING HOLE**
- WIDE VARIETY OF 6V & 12V MODELS**

### MOUNTING ANGLE

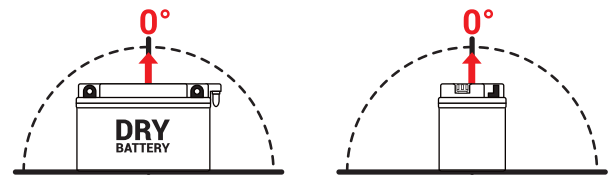

### UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	-