

BIX30L-BS

BS CODE: **300753**

VOLTAGE **12V**

CCA **400A**


CAPACITY 20HR **31.6Ah**

CAPACITY 10HR **30.0Ah**




DIMENSIONS

LENGTH	166 ±2mm	6.54 ±0.08inch
WIDTH	126 ±2mm	4.96 ±0.08inch
TOTAL HEIGHT	173 ±2mm	6.81 ±0.08inch
WEIGHT	7.65 kg ±5%	16.87 lbs ±5%

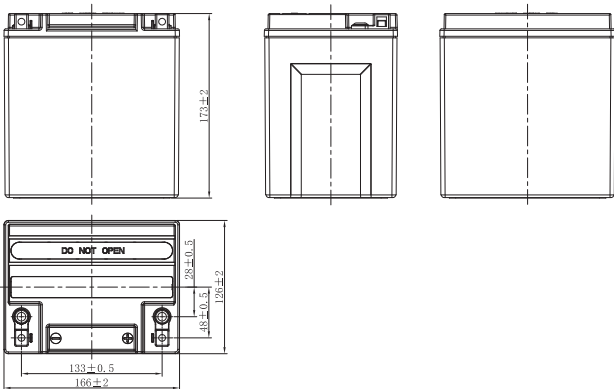

TERMINAL (mm)

POLARITY

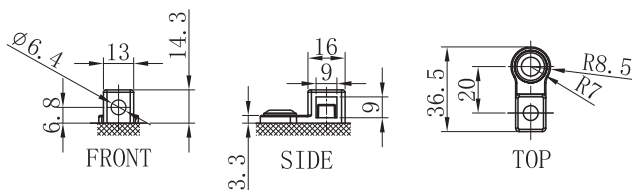

MF FEATURES



TO BE ACTIVATED

AGM (Absorbent Glass Mat) technology.



ACID PACK INCLUDED

For initial filling.



NO MAINTENANCE*

VRLA (Valve Regulated Lead Acid) design.



TIGHTLY SEALED AFTER FILLING

Electrolyte is held in a glass fiber mat.



SUPERIOR POWER & EXTENDED CYCLE LIFE



LONG SHELF LIFE

No need to be recharged while stocked (if not activated).

*once activated

MOUNTING ANGLE



UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	BB30L-B