

BT5AL-BS


BS CODE: **300747**

VOLTAGE **12V**

CCA **75A**

CAPACITY 20HR **5.0Ah**

CAPACITY 10HR **5.0Ah**

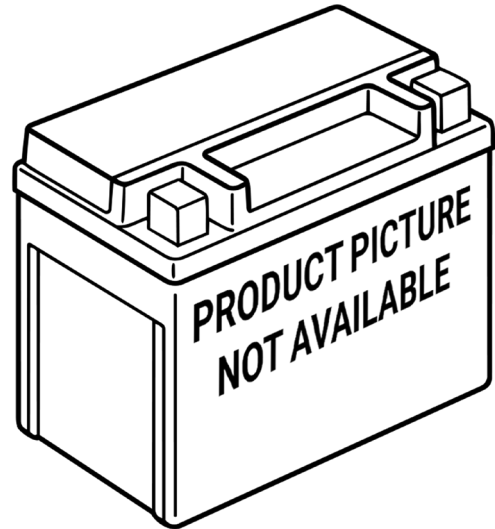

DIMENSIONS		
LENGTH	120 ±2mm	4.72 ±0.08inch
WIDTH	60 ±2mm	2.36 ±0.08inch
TOTAL HEIGHT	130 ±2mm	5.12 ±0.08inch
WEIGHT	1.57 kg ±5%	3.46 lbs ±5%

TERMINAL (mm)	
POLARITY	
FRONT	SIDE
	TOP

MF FEATURES	
	TO BE ACTIVATED AGM (Absorbent Glass Mat) technology.
	ACID PACK INCLUDED For initial filling.
	NO MAINTENANCE* VRLA (Valve Regulated Lead Acid) design.
	TIGHTLY SEALED AFTER FILLING Electrolyte is held in a glass fiber mat.
	SUPERIOR POWER & EXTENDED CYCLE LIFE
	LONG SHELF LIFE No need to be recharged while stocked (if not activated).

*once activated

MOUNTING ANGLE	

UPGRADE FOR			
SLA MAX	SLA	MF	DRY
-	-	-	-