

## BTX20-BS

BS CODE: 300611

VOLTAGE **12V**

CCA **270A**


CAPACITY 20HR **18.9Ah**

CAPACITY 10HR **18.0Ah**



### DIMENSIONS

<b>LENGTH</b>	175 ±2mm	6.89 ±0.08inch
<b>WIDTH</b>	87 ±2mm	3.43 ±0.08inch
<b>TOTAL HEIGHT</b>	155 ±2mm	6.1 ±0.08inch
<b>WEIGHT</b>	4.45 kg ±5%	9.81 lbs ±5%

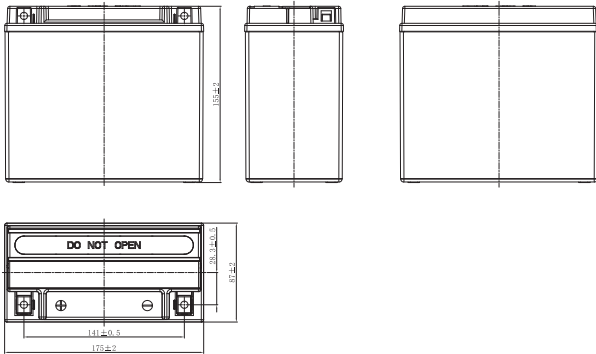

### TERMINAL (mm)


<b>POLARITY</b>		
<b>FRONT</b>	<b>SIDE</b>	<b>TOP</b>

### MF FEATURES

- TO BE ACTIVATED**  
AGM (Absorbent Glass Mat) technology.
- ACID PACK INCLUDED**  
For initial filling.
- NO MAINTENANCE\***  
VRLA (Valve Regulated Lead Acid) design.
- TIGHTLY SEALED AFTER FILLING**  
Electrolyte is held in a glass fiber mat.
- SUPERIOR POWER & EXTENDED CYCLE LIFE**
- LONG SHELF LIFE**  
No need to be recharged while stocked (if not activated).

\*once activated

### MOUNTING ANGLE

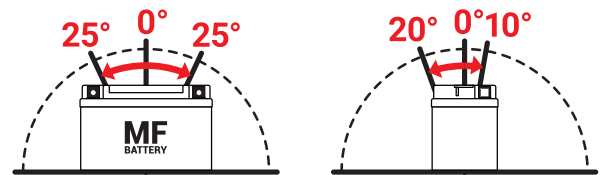

### UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	-