

6N11A-1B/3A

BS CODE: 300915

VOLTAGE **12V**

CCA **90A**

CAPACITY 20HR **11.6Ah**

CAPACITY 10HR **11.0Ah**




DIMENSIONS		
LENGTH	121 ±2mm	4.76 ±0.08inch
WIDTH	58 ±2mm	2.28 ±0.08inch
TOTAL HEIGHT	130 ±2mm	5.12 ±0.08inch
WEIGHT	1.76 kg ±5%	3.88 lbs ±5%

TERMINAL (mm)	
POLARITY	

SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

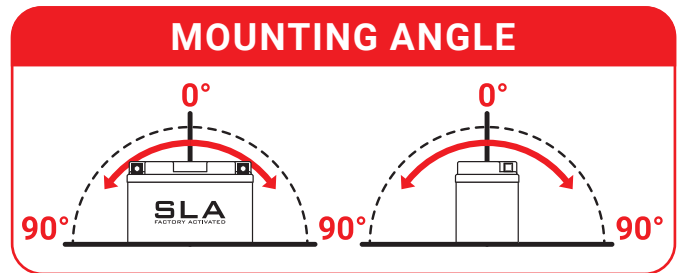

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	6N11A-1B 6N11A-3A