

6N6-3B/B-1

BS CODE: **300917**

VOLTAGE **12V**

CCA **50A**


CAPACITY 20HR **6.3Ah**

CAPACITY 10HR **6.0Ah**



DIMENSIONS

LENGTH	95 ±2mm	3.74 ±0.08inch
WIDTH	55 ±2mm	2.17 ±0.08inch
TOTAL HEIGHT	117 ±2mm	4.61 ±0.08inch
WEIGHT	1.16 kg ±5%	2.56 lbs ±5%

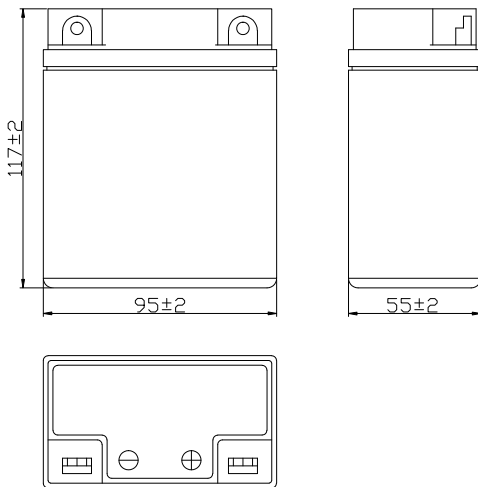


SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

TERMINAL (mm)

POLARITY

MOUNTING ANGLE

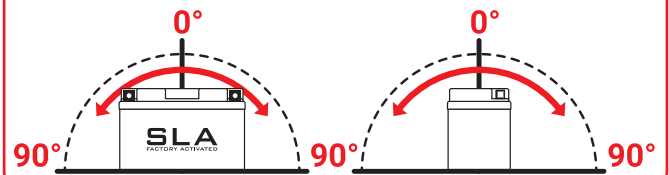

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	6N6-3B 6N6-3B-1