

BB14A-A2

BS CODE: **300838**

VOLTAGE **12V**

CCA **200A**

CAPACITY 20HR **14.7Ah**

CAPACITY 10HR **14.0Ah**



DIMENSIONS

LENGTH	134 ±2mm	5.28 ±0.08inch
WIDTH	88 ±2mm	3.46 ±0.08inch
TOTAL HEIGHT	176 ±2mm	6.93 ±0.08inch
WEIGHT	4.84 kg ±5%	10.67 lbs ±5%


SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

TERMINAL (mm)

POLARITY

MOUNTING ANGLE

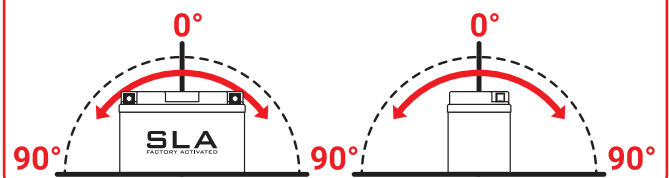

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	BB14A-A1 BB14A-A2